



**DUNNAIR**  
(Aust) Pty Ltd

R410a Refrigerant  
**SHE45**  
*Economy Cycle Split Ducted*

Performance Data

INDOOR COIL ENTERING AIR TEMP °C		OUTDOOR COIL ENTERING AIR TEMPERATURE °C											
		30°C			35°C			40°C			45°C		
		Tot Cap KW	Sens Cap KW	LWB °C	Tot Cap KW	Sens Cap KW	LWB °C	Tot Cap KW	Sens Cap KW	LWB °C	Tot Cap KW	Sens Cap KW	LWB °C
DB °C	WB °C												
21	17	44.1	27.1	12.0	41.8	26.1	12.3	39.5	25.1	12.6	37.5	25.1	12.8
	18	45.5	24.0	12.4	43.2	23.1	13.3	40.8	22.1	13.6	38.9	21.3	13.8
	19	47.0	21.2	14.0	44.7	20.2	14.3	42.2	19.2	14.6	40.4	18.4	14.8
	20	48.6	18.3	15.1	46.1	17.3	15.4	43.6	16.4	15.7	41.8	15.7	15.9
23	17	44.0	32.6	11.9	41.7	31.7	12.2	39.4	30.8	12.5	37.5	30.0	12.8
	18	45.6	29.9	13.0	43.2	28.9	13.3	40.9	28.0	13.6	39.0	27.3	13.8
	19	47.0	26.6	14.0	44.6	25.6	14.3	42.1	24.6	14.6	40.3	23.9	14.8
	20	48.5	23.7	15.1	46.1	22.7	15.4	43.6	21.8	15.7	41.8	21.1	15.9
	21	50.1	20.9	16.3	47.6	20.0	16.6	45.0	19.0	16.9	43.3	18.4	17.1
25	17	44.4	37.8	11.8	42.1	36.8	12.0	39.8	35.7	12.3	37.9	34.9	12.6
	18	45.5	36.6	13.0	43.2	34.4	13.3	40.8	33.4	13.6	38.9	32.7	13.8
	19	47.0	35.0	14.0	44.6	31.3	14.3	42.2	30.3	14.6	40.3	29.6	14.8
	20	48.5	33.5	15.1	46.0	28.2	15.4	43.5	27.2	15.7	41.7	26.5	15.9
	21	50.1	31.9	16.1	47.6	25.4	16.4	45.0	24.4	16.7	43.2	23.8	16.9
27	17	45.2	41.6	11.7	43.0	40.4	12.0	40.8	39.1	12.3	39.0	38.0	12.5
	18	45.8	40.5	12.9	43.5	39.5	13.2	41.1	38.6	13.5	39.3	37.8	13.7
	19	47.0	37.7	14.0	44.6	36.8	14.3	42.1	35.8	14.6	40.3	35.0	14.8
	20	48.5	34.9	15.0	46.1	33.9	15.3	43.6	33.0	15.6	41.8	32.3	15.8
	21	49.9	31.8	16.2	47.5	30.9	16.5	44.9	30.0	16.9	43.1	29.3	17.1
29	17	46.2	45.0	11.5	44.2	43.4	11.7	42.1	42.1	12.0	40.4	40.4	12.2
	18	46.7	44.1	12.8	44.5	42.9	13.0	42.2	41.6	13.3	40.4	40.4	13.6
	19	47.2	43.1	13.8	44.9	42.2	14.1	42.5	41.2	14.4	40.4	40.4	14.6
	20	48.4	39.9	15.0	46.0	39.0	15.3	43.5	38.0	15.6	41.7	37.3	15.8
	21	50.0	37.2	16.1	47.5	36.2	16.4	44.9	35.3	16.7	43.1	34.6	16.9
31	17	47.9	47.9	11.4	45.7	45.7	11.7	43.7	43.7	12.0	42.2	42.2	12.2
	18	47.9	47.9	12.6	45.7	45.7	12.9	43.7	43.7	13.2	42.2	42.2	13.4
	19	47.9	47.9	13.8	45.7	45.7	14.1	43.7	43.7	14.4	42.2	42.2	14.6
	20	48.7	45.9	15.1	45.7	45.7	15.4	43.7	43.7	15.7	42.2	42.2	15.9
	21	50.0	42.5	15.9	47.5	41.6	16.2	44.9	40.6	16.5	43.2	40.0	16.7

Capacity multipliers should be applied to the above capacities to adjust for reduced or increased air flow.



### Technical Specification SHE45 Economy Cycle Split Ducted

Indoor Unit Model Number	SHE45N	Nominal Evaporator Air Flow (l/s)	2700
Outdoor Unit Model Number	SHE45W	Number of Compressors	2
Total Cooling Capacity (kW)*	44.8	Power Requirements (Volt / Phase)	415 / 3
Sensible Cooling Capacity (kW)*	37.6	Normal Max. Current (Amps / Phase)	32.8
Heating Capacity (kW)**	44.2		

\*Entering air @ 27/19°C and ambient 35°C      \*\* Entering air @ 21°C DB and 7°C ambient

#### Air Quantity Multiplying Factors

% Rated Air Quantity-Nominal 2700 l/s					
Capacity	80	90	100	110	120
Total	0.95	0.98	1.00	1.02	1.04
Sensible	0.89	0.95	1.00	1.05	1.09

#### Heating Performance Data

Outdoor Coil Entering DB temp					
	0	4	8	12	18
Heating Capacity kW	26.1	29.1	33.3	36.9	43.7

#### Heating Performance Correction

% Rated Air Quality	Multiplier	Return Air Temp °C	Multiplier	Outdoor Air Temp °C	Approx. Defrost Factor
80	0.93	15	1.05	0	0.80
90	0.97	18	1.03	2	0.78
100	1.00	21	1.00	4-6	0.75
110	1.03	24	0.97	7	0.87
120	1.05	27	0.95	8	1.00

#### Compressor

Number Per Unit	2
Type	Scroll
RPM (Nom)	2900
Normal Max. Current (Amps / Phase)	2 × 12
Locked Rotor Current (Amps / Phase)	2 × 101
Displacement (m³/h)	2 × 19.2

#### Electrical Controls and Safeties

High Pressure Switch (Setting kPa)	2800	Defrost	
Low Pressure Switch (Setting kPa)	100	Initiation Temperature (°C)	-4
Indoor Fan Overload	Internal	Termination Temperature (°C)	10
Outdoor Fan Overload	Internal	Min. Period Between De-Ice (min)	33
Compressor Delay Timer	300 sec	Max. De-Ice Period (min)	4

#### Standard Features

Manual reset high pressure and auto reset low pressure cutouts	
Thermal overload protection on all motors	Suction line accumulator
Compressor crankcase heater	Automatic de-ice system
Limit start timer (anti short cycling)	Thermally insulated indoor unit

#### Indoor Coil

Type	Copper Tube / Aluminium Fins
Face Area (m)	1.0
Air Quantity (m³/h)	2700

#### Indoor Fan

Number of Fans	1
Type	Centrifugal
Drive	Belt
Motor Voltage / Phase / Frequency	415 / 3 / 50
Motor (kW) Standard	3.0
Max. Fan Speed (rpm)	825

#### Electrical

Power Requirements	3 Phase / 415V / 50Hz
Normal Max. Current (Amps / Phase)	32.4

#### Outdoor Coil


Type	Copper Tube / Aluminium Fins
Face Area	2 × 0.73

#### Outdoor Fan


Number of Fans	2
Type	Axial
Drive	Direct
Motor Watts / rpm	2 × 300 / 950
Motor Voltage / Phase / Frequency	415 / 3 / 50

#### Refrigerant System

Refrigerant Type	R410a
Charge (kg)	2 × 5.6
Line Size (mm)	
Liquid 0-10 metres	16
Gas 0-10 metres	22
Liquid 10-20 metres	19
Gas 10-20 metres	28
Service Connections	Rotor Lock Valve
Expansion Control – in outdoor unit	TX Valve

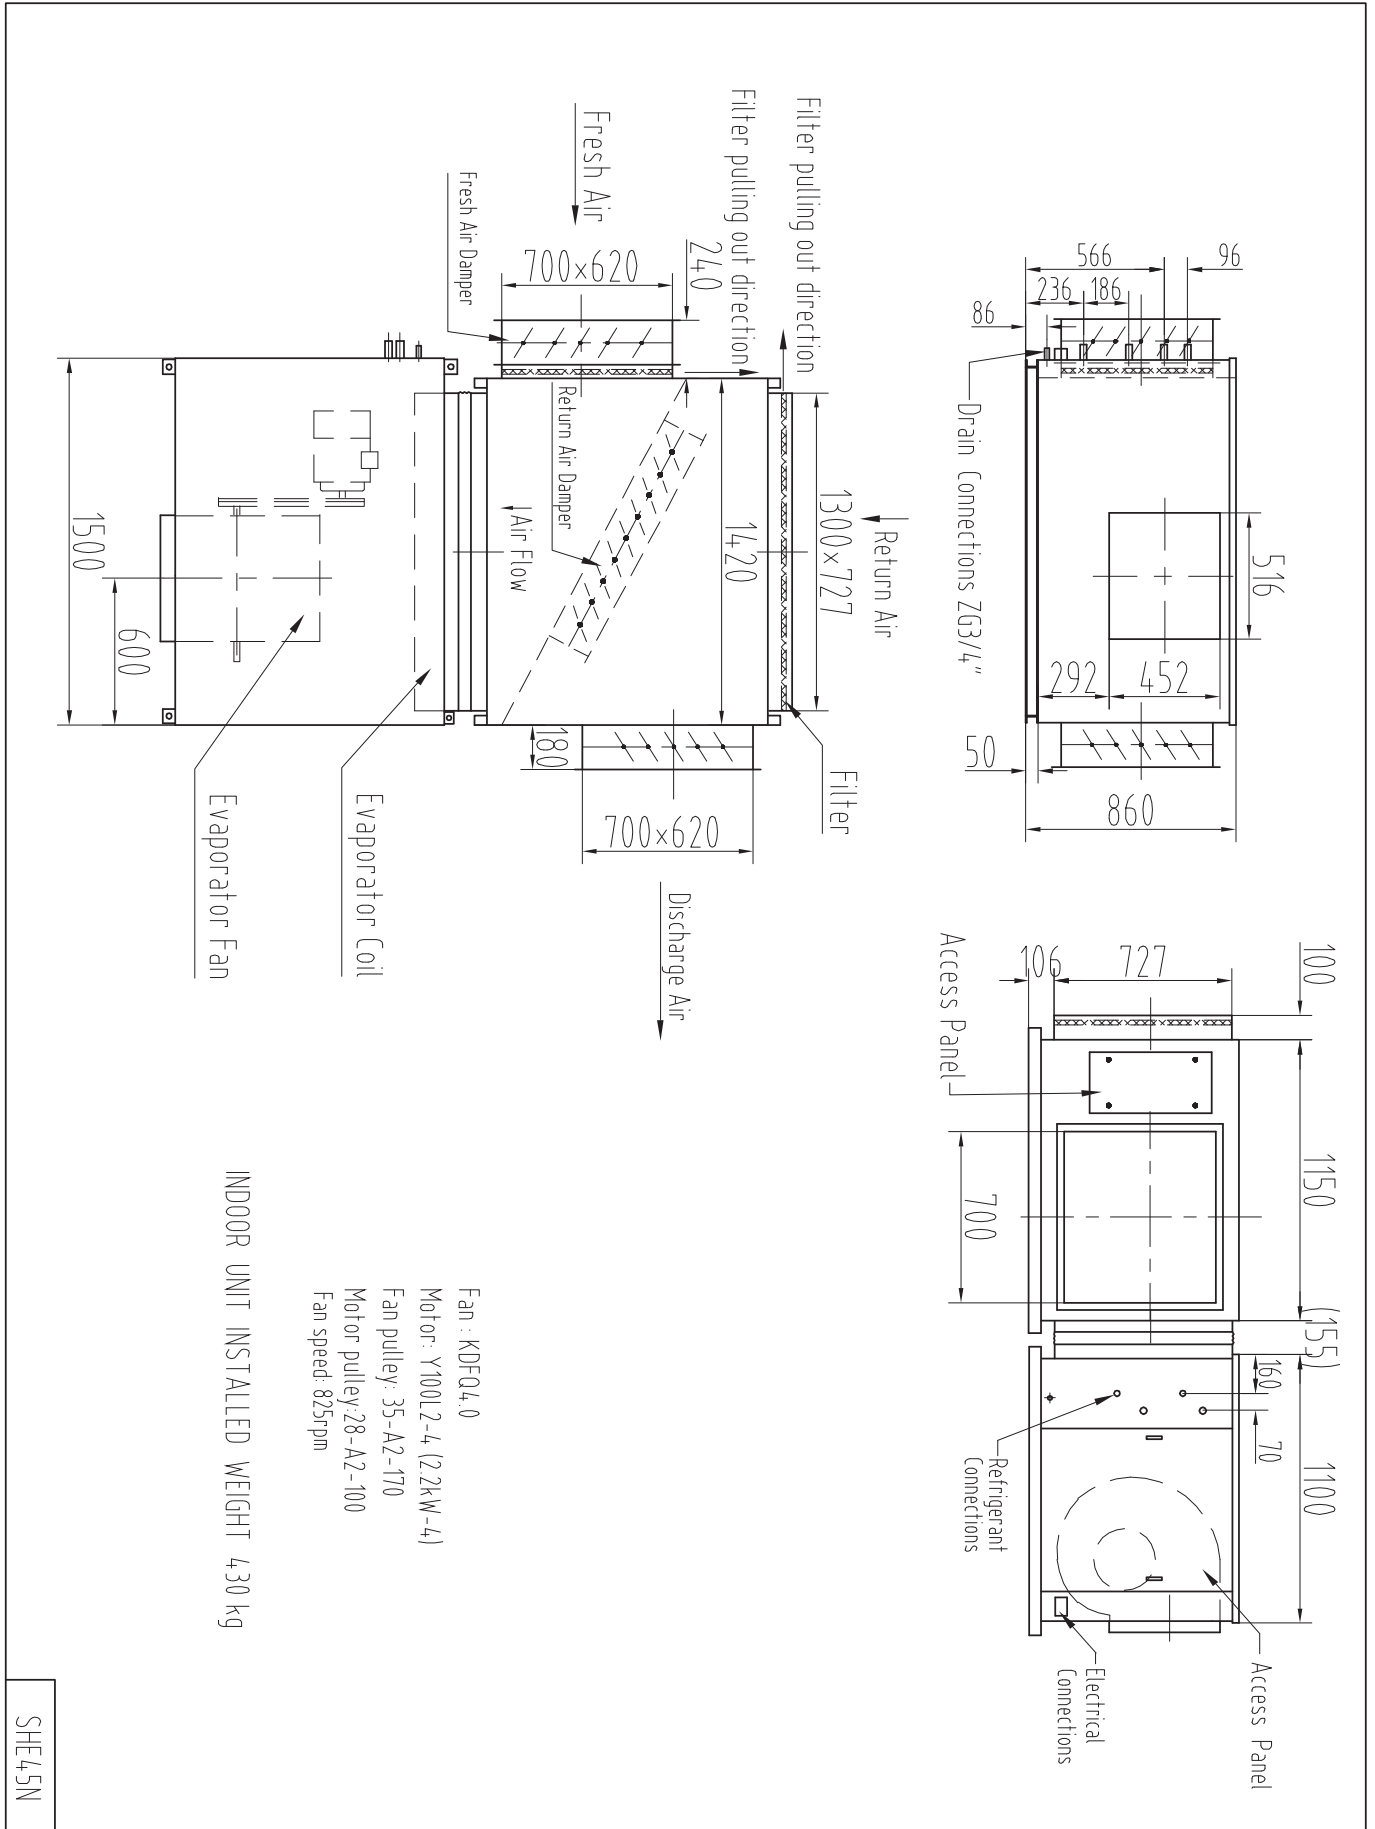

SHE45N

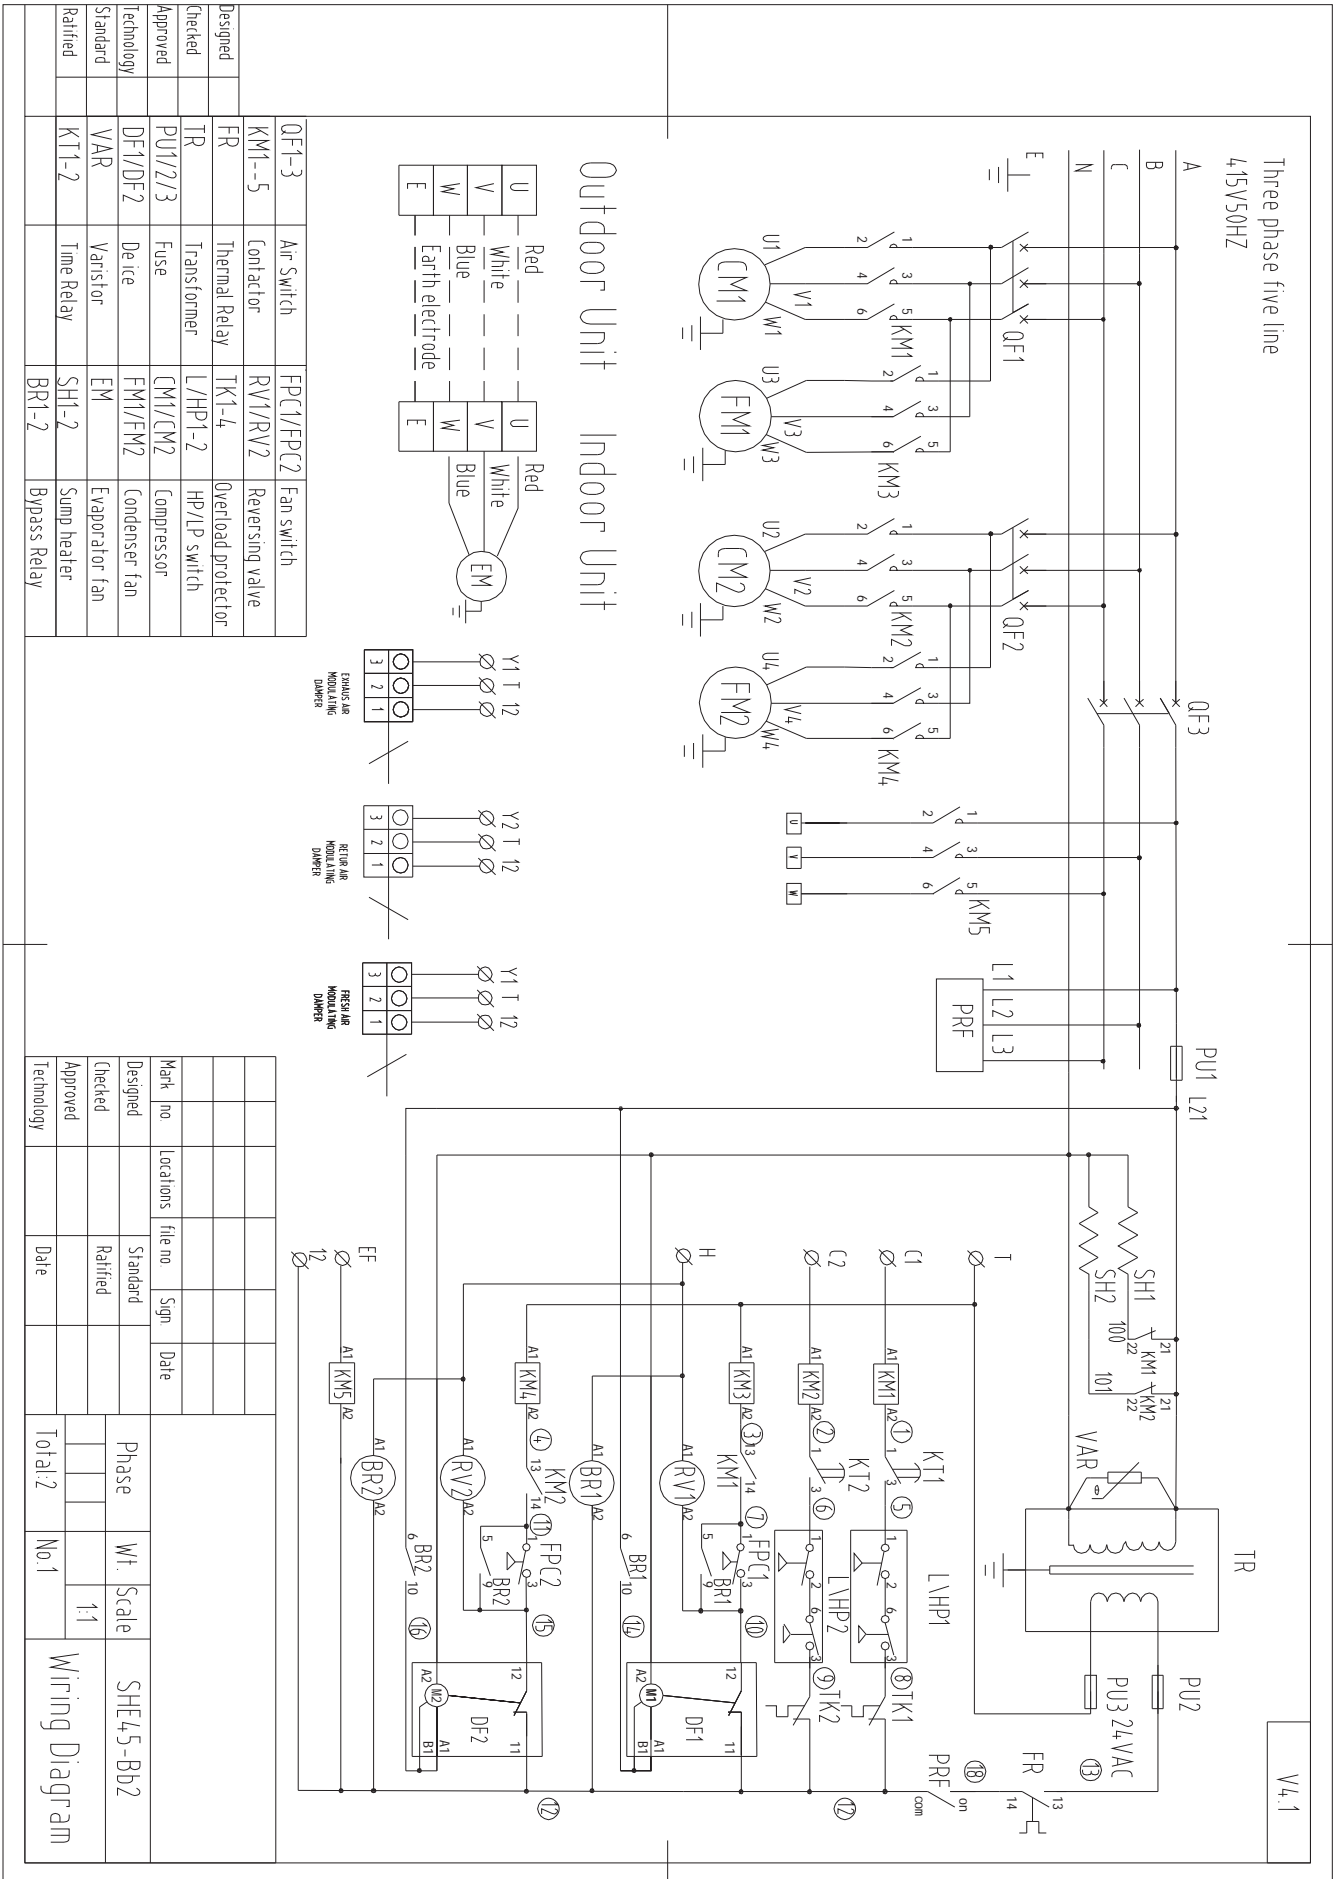


Designed	QF1-3	Air Switch	FP1/FP2	Fan switch
Checked	KM1-5	Contactors	RV1/RV2	Reversing valve
Approved	TR	Thermal Relay	TK1-4	Overload protector
Standard	PU1/2/3	Transformer	L/HP1-2	HP/LP switch
Technology	DF1/DF2	Fuse	CM1/CM2	Compressor
Ratified	VAR	De ice	FM1/FM2	Condenser fan
	KT1-2	Time Relay	SH1-2	Evaporator fan
			BR1-2	Sump Relay

Mark no.	Locations	file no.	Sign	Date
Designed				
Checked				
Approved				
Technology				

Phase	Wt.	Scale
Total: 2	No. 1	1:1

Wiring Diagram

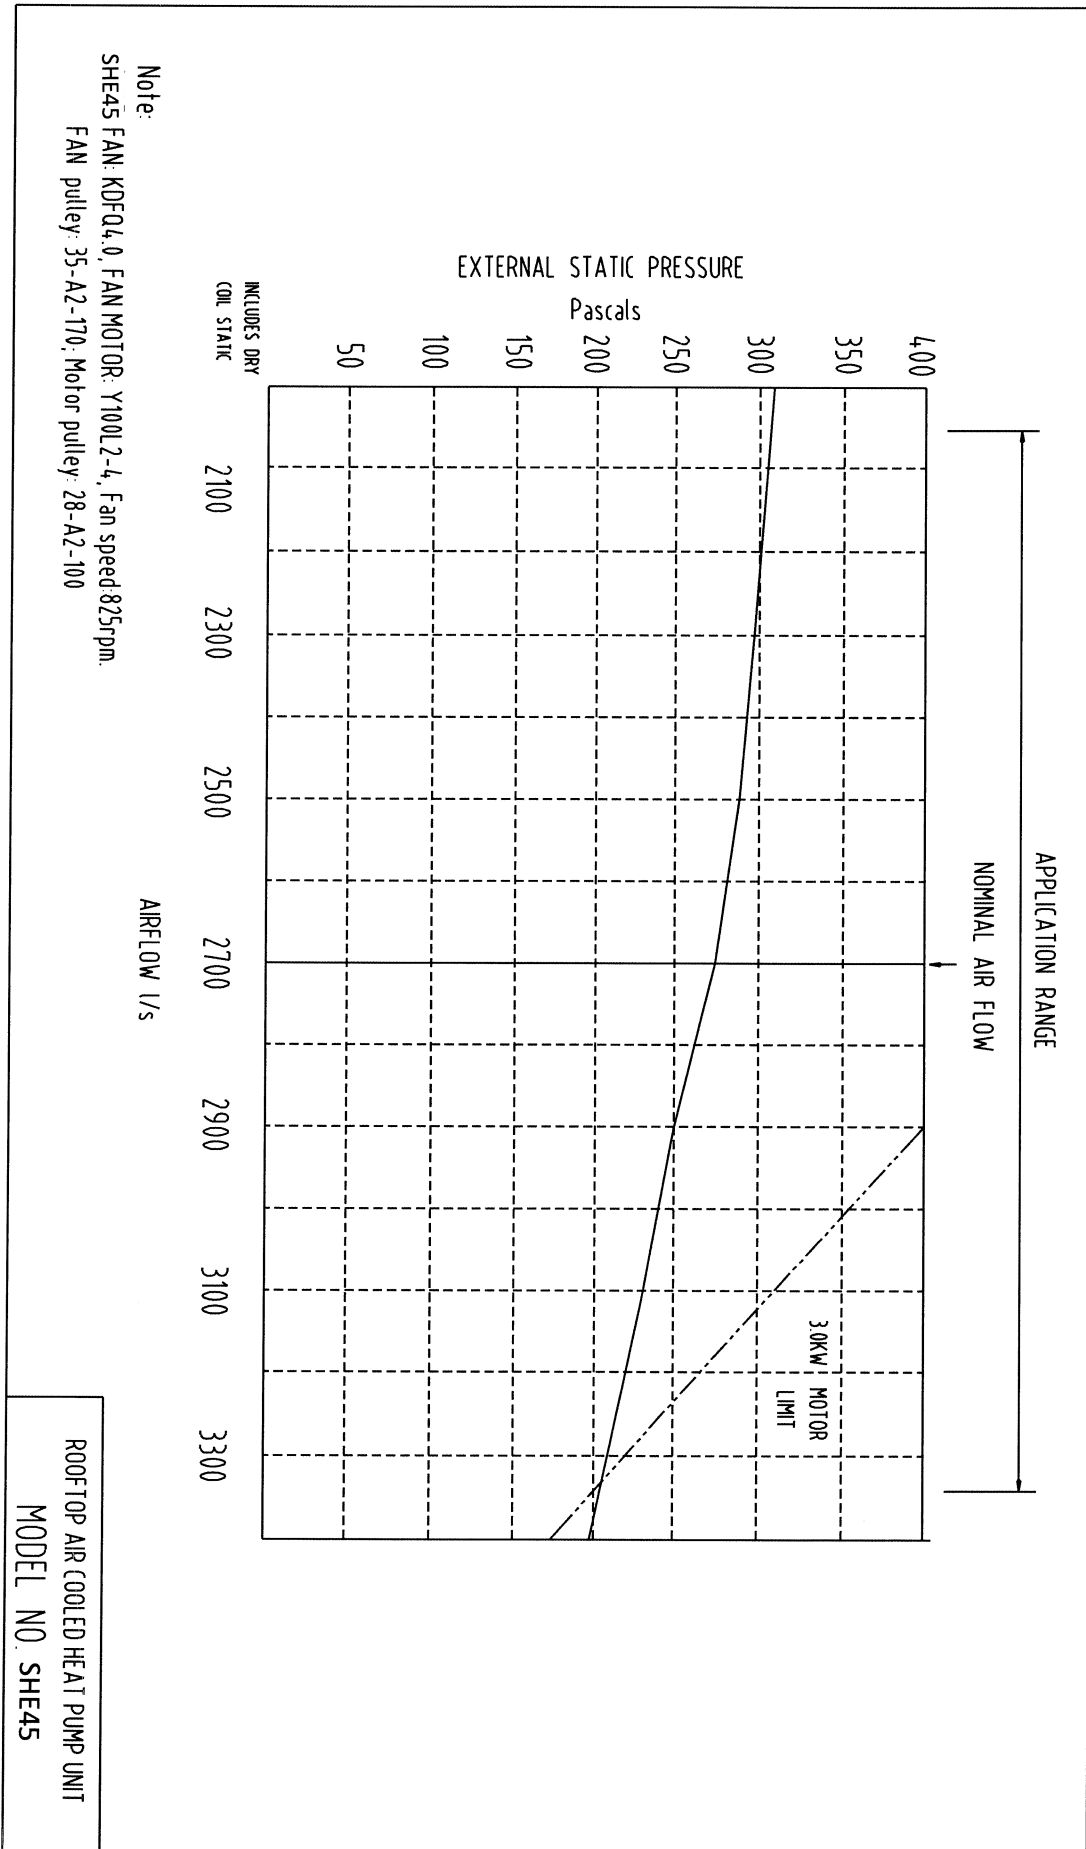


SHE45W Noise rate analysing chart

A Class: 76.2dB

Hz	dB
64Hz	81.4
125Hz	78.6
250Hz	76.5
500Hz	72.5
1000Hz	72.4
2000Hz	66.3
4000Hz	58.6
8000Hz	52.2

Noise rate analysing chart ( A Class: 76.2dB) dB

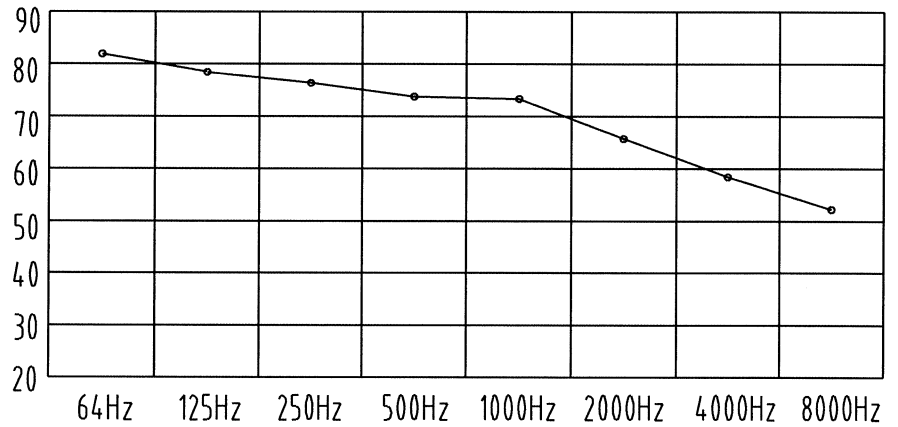

SHE45N Noise rate analysing chart

A Class: 72.2dB

Hz	dB
64Hz	80.3
125Hz	78.4
250Hz	71.8
500Hz	68.1
1000Hz	67.4
2000Hz	63.4
4000Hz	59.6
8000Hz	54.6

Noise rate analysing chart ( A Class: 72.2dB) dB

