



DUNNAIR
(Aust) Pty Ltd

WPR14L

**Ducted Water Cooled
R410a Refrigerant**

Packaged Vertical Type

TECHNICAL SPECIFICATION

Total Cooling Capacity	13.9 kW	Refrigerant	R410A
Electrical Input (Cooling)	3.97 kW	Refrigerant Charge	2.2 kg
E.E.R.(Cooling)	3.5	Minimum Water Flow	0.72 l/s
Running Amps (Total)	23.0 A	Water Coil Pressure Drop	40 kPa
Fan Motor Full Load Amps	3.3A	Filter (Option)	EU1
Electrical Supply Required	1Ph.240V.50Hz	Electric Heater (Option)	10.5 kW

COOLING CAPACITY (kW)

AIR FLOW RATE (L/S)		760			
COIL E.A.T.	DB °C	23	27	31	
	WB °C	17	19	21	
Entering Water Temperature (E.W.T) °C	20	T	14.8	15.5	16.3
		S	10.8	12.4	13.9
		FL	0.9	0.9	0.9
		HR	18.5	19.2	20.1
	25	T	14.0	14.9	16.4
		S	10.9	12.2	14.0
		FL	0.9	0.9	0.9
		HR	17.8	18.7	20.4
	30	T	13.2	<u>13.9</u>	15.5
		S	10.1	<u>11.7</u>	13.6
		FL	0.9	<u>0.9</u>	0.9
		HR	16.9	<u>17.7</u>	19.5
35	T	12.3	13.0	13.5	
	S	9.8	11.4	12.8	
	FL	0.9	0.9	0.9	
	HR	15.9	16.6	17.2	
40	T	11.8	12.1	12.7	
	S	9.5	11.0	12.5	
	FL	0.9	0.9	0.9	
	HR	15.4	15.6	16.4	

HEATING CAPACITY (kW)

WPR Reverse Cycle Version

AIR FLOW RATE (L/S)		760			
WATE FLOW RATE (L/S)		0.9			
COIL E.A.T.	DB °C	18	21	25	
Entering Water Temperature (E.W.T) °C	15	HC	13.6	13.4	12.8
		Hab	9.9	9.7	9.3
		LWT	11.4	11.4	11.6
		INPT	3.7	3.7	2.6
	20	HC	14.4	<u>14.3</u>	13.6
		Hab	10.7	<u>10.6</u>	10.0
		LWT	16.2	<u>16.2</u>	16.4
		INPT	3.8	<u>3.7</u>	3.6
	25	HC	15.7	15.4	14.9
		Hab	11.8	11.5	10.9
		LWT	20.8	20.9	21.0
		INPT	3.8	3.9	4.0

HC = Heating Capacity (kW)

Hab = Heat Absorbed (kW)

L.W.T.= Leaving Water Temperature (°C)

E.A.T.= Entering Air Temperature (°C)

INPT = Compressor Input Power (kW)

__ = Nominal Capacity (kW)

Note: All units are reverse cycle heat pump units. Models can also be provided as cooling only or cooling only with electric heater.

T = Total Capacity (kW)

S = Sensible Capacity (kW)

FL = Water Flow (l/s)


E.A.T.= Entering Air Temperature (°C)

__ = Nominal Capacity (kW)


HR = Heat Rejection

- Note:**
- Capacities are gross and do not include allowance for fan motor heat loss. For fan motor heat loss refers to Air Handling Performance.
 - Water flow and cooling capacity based on 5°C water temperature difference.


DIMENSIONS (mm)

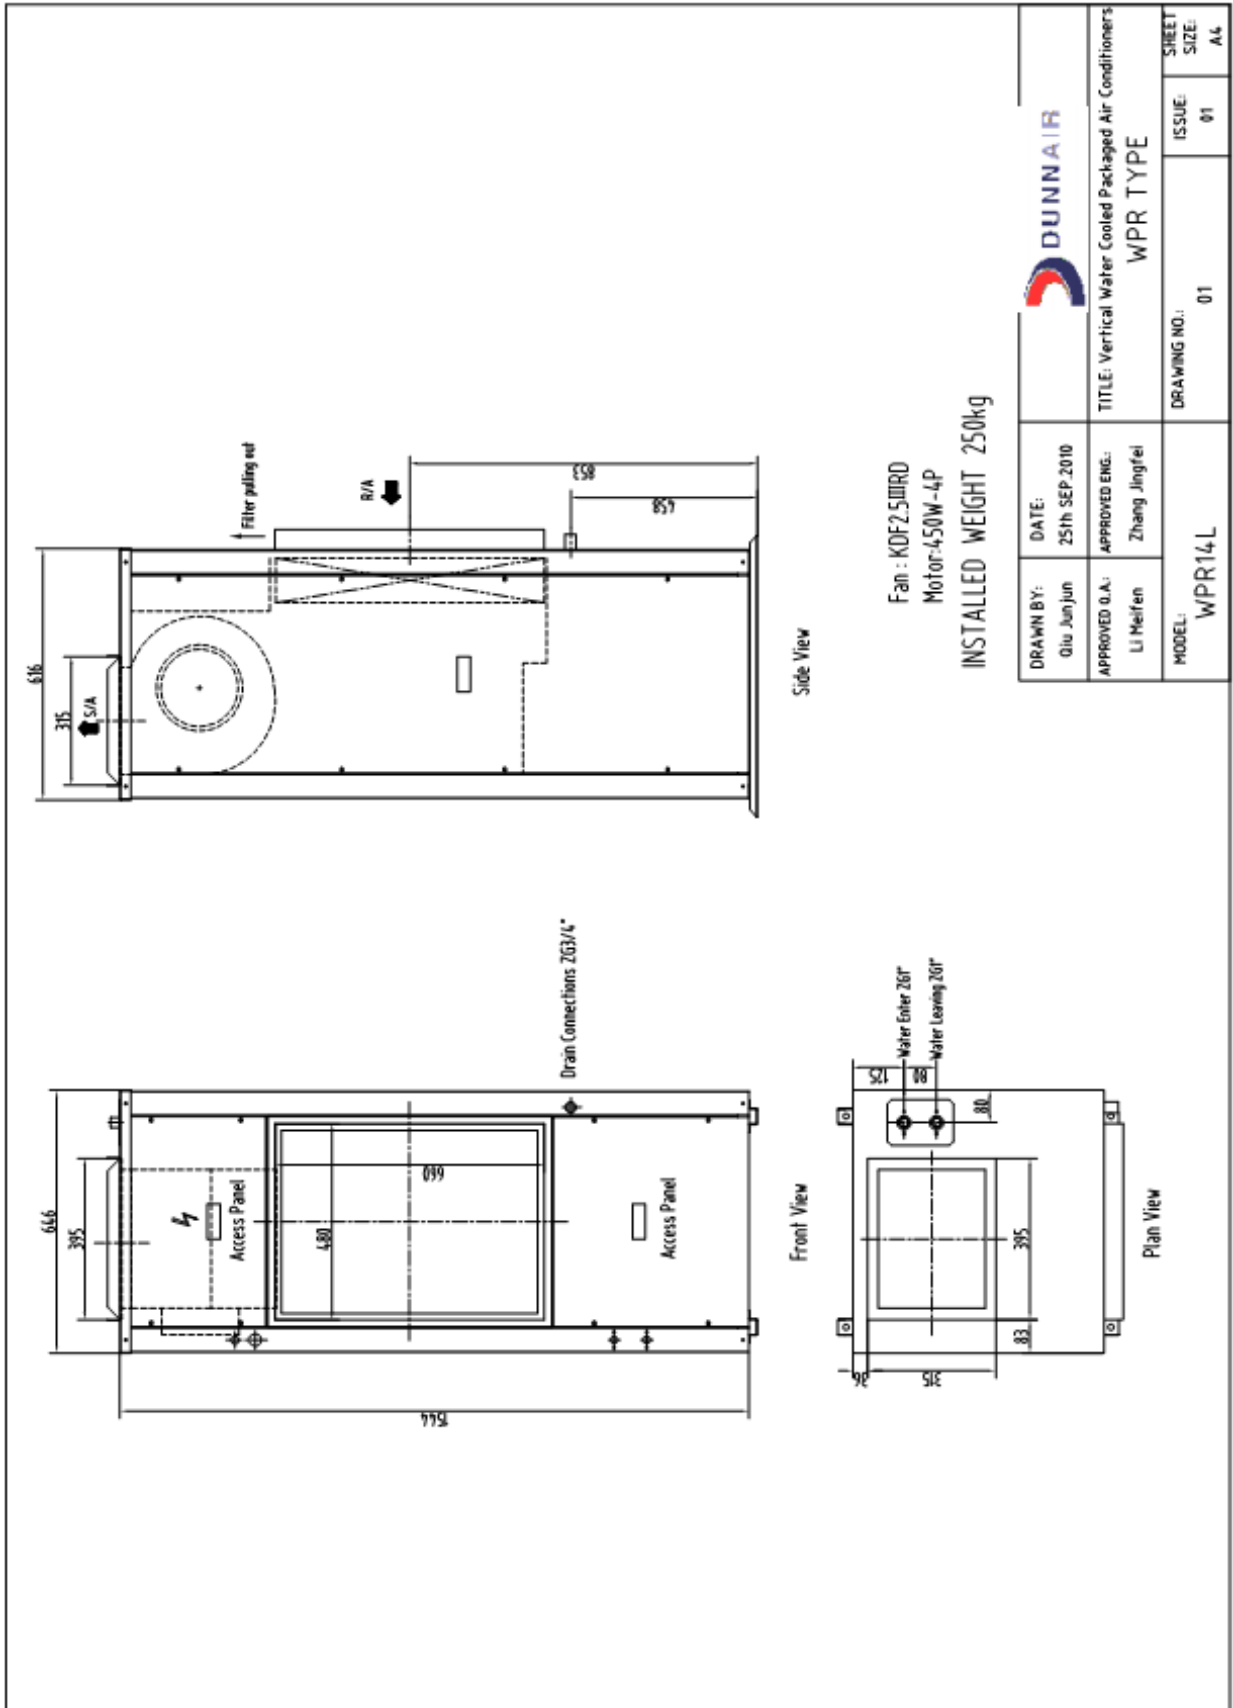


WIRING DIAGRAMS – Cooling Only

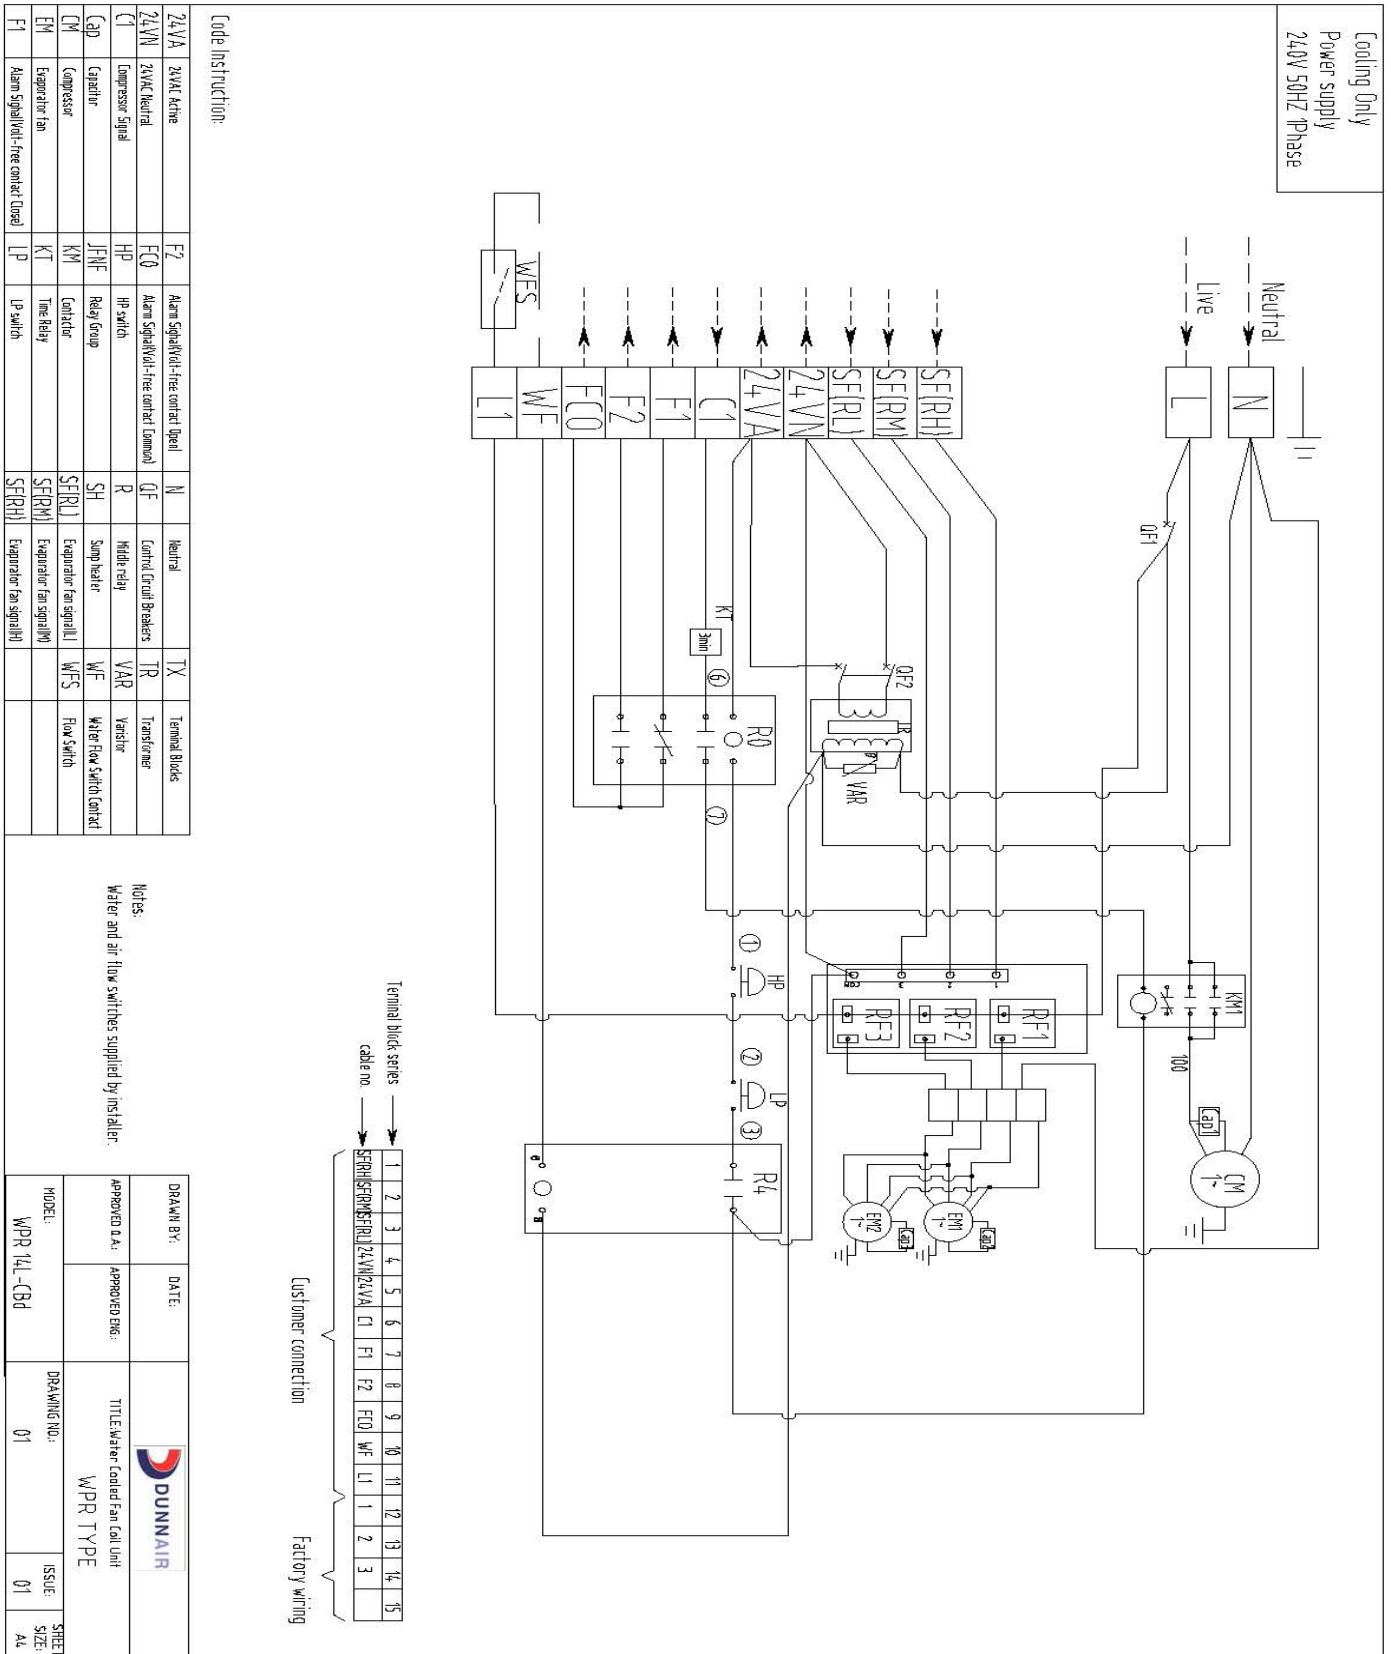

WIRING DIAGRAMS – Cooling Only with Electric Heater

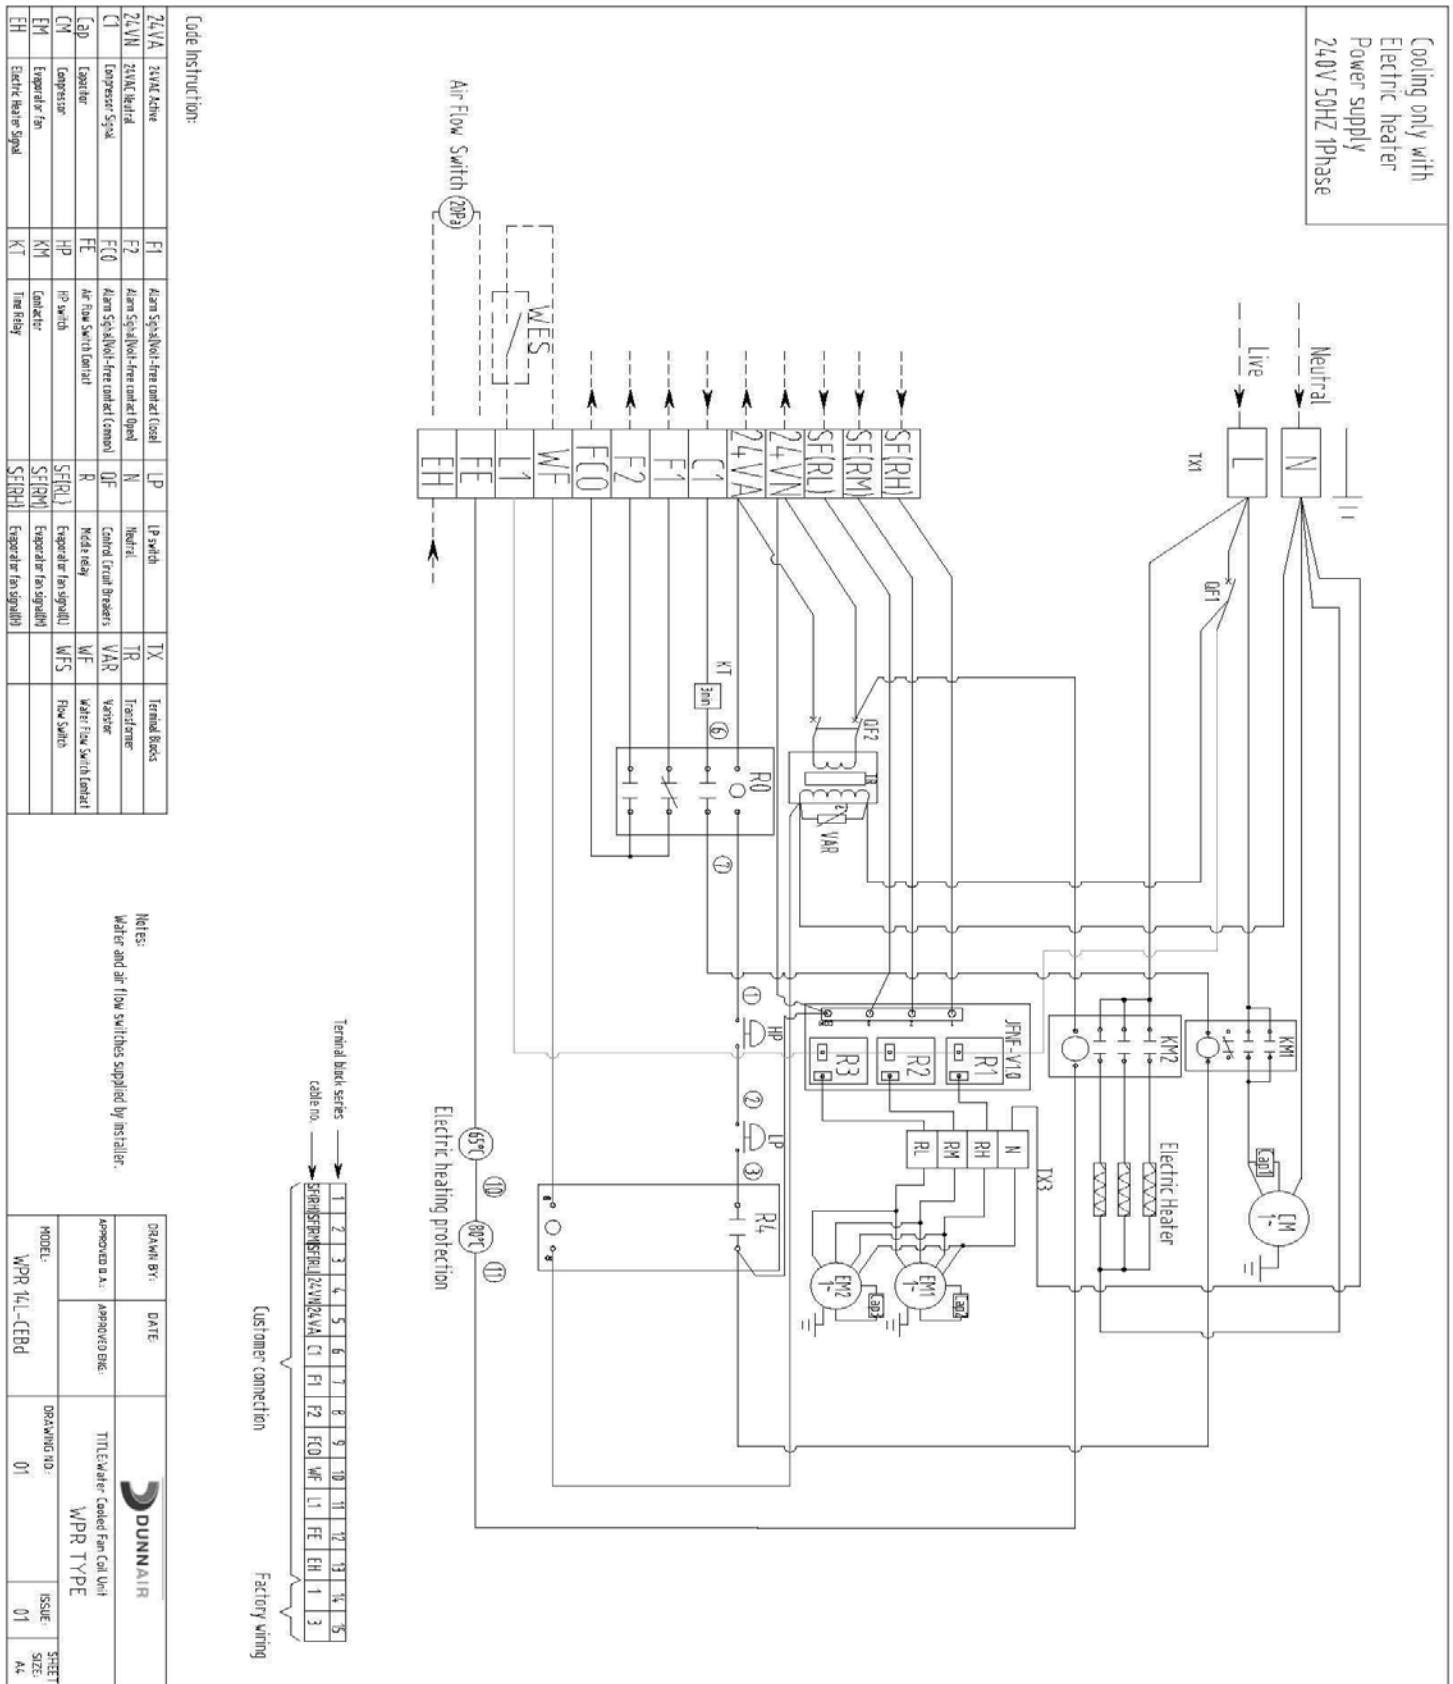


WIRING DIAGRAMS – Reverse Cycle

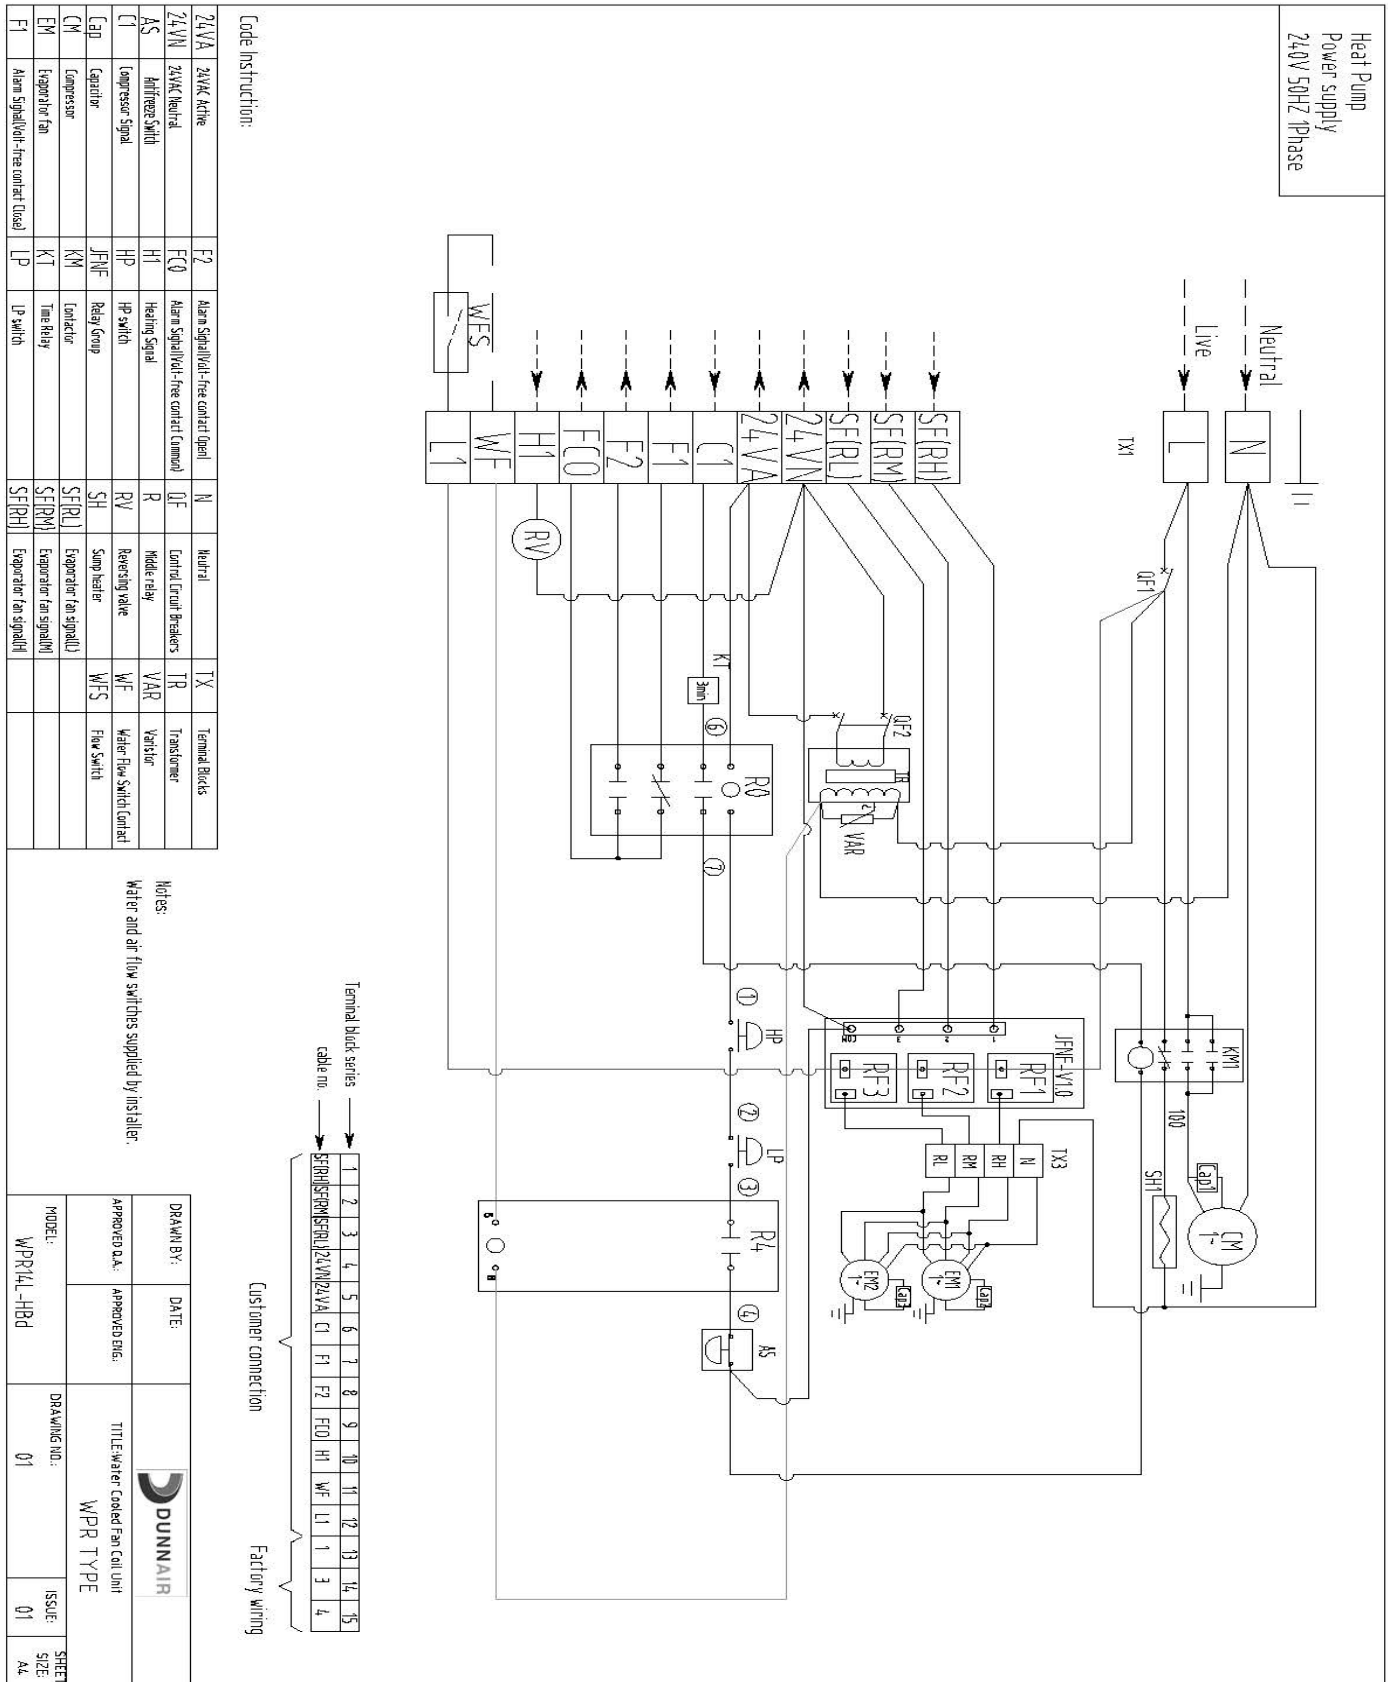

AIR HANDLING PERFORMANCE

Fan Curve (Without Filter)

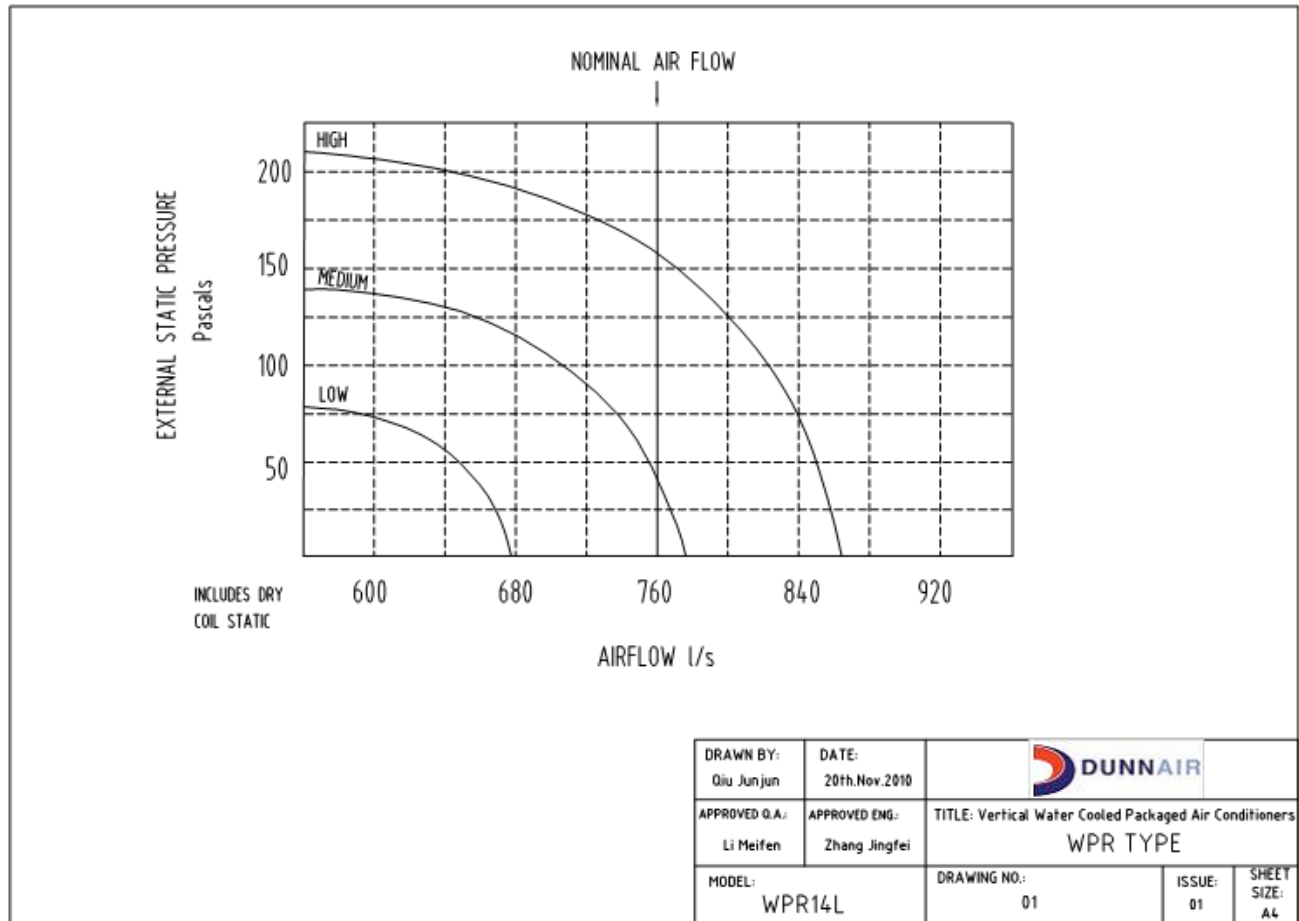

Note:

1. In tropical (high humidity) conditions, care must be taken to select an air flow which gives a suitable coil face air velocity, to prevent water carry over.
2. For applications with low resistance, be sure not to exceed the fan motor full load Amps.
3. Applications using full or high proportions of fresh air should be referred to DUNNAIR engineering office to establish of unit model.
4. EU1 rate filter pressure loss 15Pa.

AIR HANDLING PERFORMANCE


Sound Levels

WPR14L Sound Pressure Curve

A Class: 60.4dB

Hz	dB
64Hz	51.7
125Hz	55.0
250Hz	59.2
500Hz	58.5
1000Hz	55.4
2000Hz	49.6
4000Hz	48.3
8000Hz	42.1

Sound Pressure Curve (A Class: 60.4dB) dB

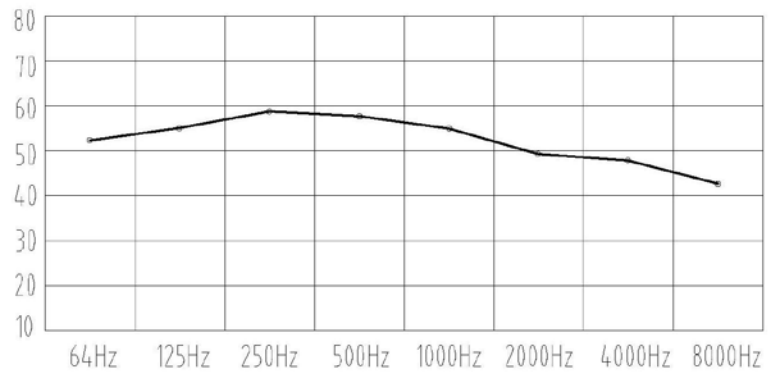

Note: Occupant at least 1.0m from sound source.

DRAWN BY: Qiu Junjun	DATE: 15th.Dec.2010			
APPROVED Q.A.: Li Melfen	APPROVED ENG.: Zhang Jingfei	TITLE: Vertical Water Cooled Packaged Air Conditioners WPR TYPE		
MODEL: WPR14L	DRAWING NO.: 01	ISSUE: 01	SHEET SIZE: A4	