



**DUNNAIR**  
(Aust) Pty Ltd

R407c Refrigerant  
**PHE160**  
*Economy Cycle Rooftop Package*

Performance Data

INDOOR COIL ENTERING AIR TEMP °C		OUTDOOR COIL ENTERING AIR TEMPERATURE °C											
		30°C			35°C			40°C			45°C		
		Tot Cap KW	Sens Cap KW	LWB °C	Tot Cap KW	Sens Cap KW	LWB °C	Tot Cap KW	Sens Cap KW	LWB °C	Tot Cap KW	Sens Cap KW	LWB °C
DB °C	WB °C												
21	17	153.1	94.6	10.9	145.3	91.4	11.2	136.9	87.8	11.6	131.1	87.8	11.8
	18	158.6	85.4	11.5	150.4	81.9	12.3	141.5	78.1	12.6	136.0	75.7	12.9
	19	164.3	75.7	13.2	155.9	72.3	13.5	146.8	68.4	13.9	141.1	66.2	14.1
	20	170.6	65.6	14.1	161.7	61.9	14.5	152.1	58.0	14.9	146.8	55.7	15.2
23	17	153.8	113.1	10.8	145.9	109.9	11.2	137.5	106.2	11.5	131.7	103.9	11.8
	18	158.6	103.7	11.9	150.4	100.2	12.2	141.5	96.4	12.6	136.0	93.9	12.9
	19	164.3	93.9	13.0	155.7	90.6	13.4	146.6	86.9	13.8	141.1	84.5	14.1
	20	170.4	83.9	14.1	161.7	80.2	14.5	152.1	76.3	14.9	146.6	74.0	15.1
	21	177.0	73.8	15.1	167.7	70.1	15.5	157.7	66.0	15.9	152.3	63.6	16.2
25	17	155.3	130.1	10.7	147.3	126.4	11.0	139.0	122.6	11.4	137.3	120.0	11.7
	18	159.0	125.8	12.0	150.8	119.3	12.3	142.0	115.5	12.7	136.4	113.1	13.0
	19	164.1	119.8	13.0	155.7	108.8	13.4	146.6	105.2	13.8	140.9	102.8	14.0
	20	170.4	112.9	14.1	161.5	98.7	14.5	151.9	94.6	14.9	146.6	92.5	15.1
	21	176.6	105.4	15.1	167.7	82.1	15.5	157.7	84.3	15.9	152.3	82.1	16.1
27	17	162.0	144.3	10.6	150.6	140.0	10.9	142.4	135.1	11.3	137.3	132.0	11.6
	18	163.5	141.1	11.8	152.3	137.6	12.1	143.5	133.8	12.5	139.5	131.4	12.7
	19	165.8	130.9	12.8	156.2	127.5	13.2	146.9	123.7	13.6	141.5	121.3	13.8
	20	170.6	121.7	14.0	161.5	118.1	14.3	151.9	114.2	14.7	146.6	112.1	14.9
	21	176.6	110.3	15.1	167.5	106.6	15.5	157.5	102.6	15.9	152.1	100.4	16.1
29	17	162.0	149.1	10.5	154.6	151.2	10.9	146.6	145.1	11.3	141.5	141.5	11.5
	18	163.5	146.6	11.7	155.5	148.8	12.1	146.9	144.3	12.5	141.5	141.5	12.7
	19	165.8	144.0	12.9	157.5	147.1	13.2	148.2	143.2	13.6	141.5	135.2	13.9
	20	170.6	139.6	14.0	161.7	135.9	14.3	152.1	131.6	14.8	146.8	129.7	15.0
	21	176.6	128.6	15.1	167.5	124.9	15.5	157.5	120.9	15.9	152.1	118.7	16.1
31	17	167.1	166.7	10.2	160.0	160.0	10.5	152.1	152.0	10.9	147.5	147.5	11.1
	18	168.0	164.7	11.5	160.2	159.6	11.8	152.1	152.0	12.2	147.5	147.5	12.5
	19	168.8	163.0	12.7	160.6	159.0	13.1	152.1	151.7	13.5	147.5	147.5	13.7
	20	171.7	158.7	13.9	163.0	155.2	14.3	150.8	149.8	14.7	148.0	147.1	15.0
	21	176.8	148.2	15.1	167.7	144.5	15.5	140.1	139.7	15.9	152.3	138.3	16.2



## Technical Specification PHE160 Economy Cycle Rooftop Package

Total Cooling Capacity (kW)	156.2	Number of Compressors	2
Sensible Cooling Capacity (kW)	127.5	Power V / Ph	415 / 3
Heating Capacity (kW)	152.5	Nominal Max. Current (A)	140.2
Nominal Evaporator Air Flow (l/s)	8500	Power Input (kW)	65.2
*Cooling cap entering air 27°/19°C (DB/WB) Ambient 35°C		** Heating cap entering air 21°C Outdoor ambient 7°C	

### Cooling Performance Correction

Capacity	% Rated Air Flow				
	80	90	100	110	120
Total	0.95	0.98	1.00	1.02	1.04
Sensible	0.89	0.95	1.00	1.05	1.09

### Heating Capacity

Amb. °C DB	0	4	8	12	18
Cap kW	119.2	131.6	152.5	167.6	201.6
Heating cap is based on 21°C DB. Frost formation will have greatest effect at amb 4 to 6°C. Above 8°C defrost is unlikely and a factor of 1 may be used.					

### Heating Performance Correction

% Air Flow	×	Return Air Temp °C	×	O/door Air Temp °C	Approx. Defrost Factor
80	0.93	15	1.05	0	0.80
90	0.97	18	1.03	2	0.78
100	1.00	21	1.00	4–6	0.75
110	1.03	24	0.97	7	0.87
120	1.05	27	0.95	8	1.00

### Compressors

Number Per Unit	2
Type	Hermetic Scroll
Nominal RPM	2900
Nominal Max. Amps	2 × 49.3
Locked Rotor Amps	2 × 270
Displacement (m³/h)	2 × 76.1

### Electrical Controls and Safeties

Indoor Fan Overload	Internal	Defrost Cycle Start °C	-4
Outdoor Fan Overload	Internal	Defrost Cycle End °C	10
Compressor Delay Timer	300 sec	Min. Defrost Cycle	33 mins
High Pressure Switch (kPa)	2800	Max. Defrost Period	4 mins
Low Pressure Switch (kPa)	100		

### Standard Features

HP/LP Cutouts	Thermal Overload Protection
Crankcase Heater	Limit Start Timer
Automatic De-Ice	Indoor 25mm Insulation
Gas Separator	240 Volt Control

### Evaporator Coil

Type	Copper tube alum. fins
Face Area (m²)	2 × 1.38

### Condenser Coil

Type	Copper tube alum. fins
Face Area (m²)	2 × 1.84

### Evaporator Fan


Number of Fans	1
Type	Centrifugal
Drive	Belt
Motor V / Ph / Hz	415 / 3 / 50
Motor Output Power (kW)	15
Max. Fan Speed (rpm)	660


### Condenser Fan


Number of Fans	4
Type	Axial
Drive	Direct
Motor Output Power (kW)	4 × 0.75
Motor V / Ph / Hz	415 / 3 / 50

### Refrigerant System

Refrigerant Type	R407c
Nominal Charge Required	2 × 18.8kg
Service Connection	Rotor Lock Valve
Expansion Control	TX Valve

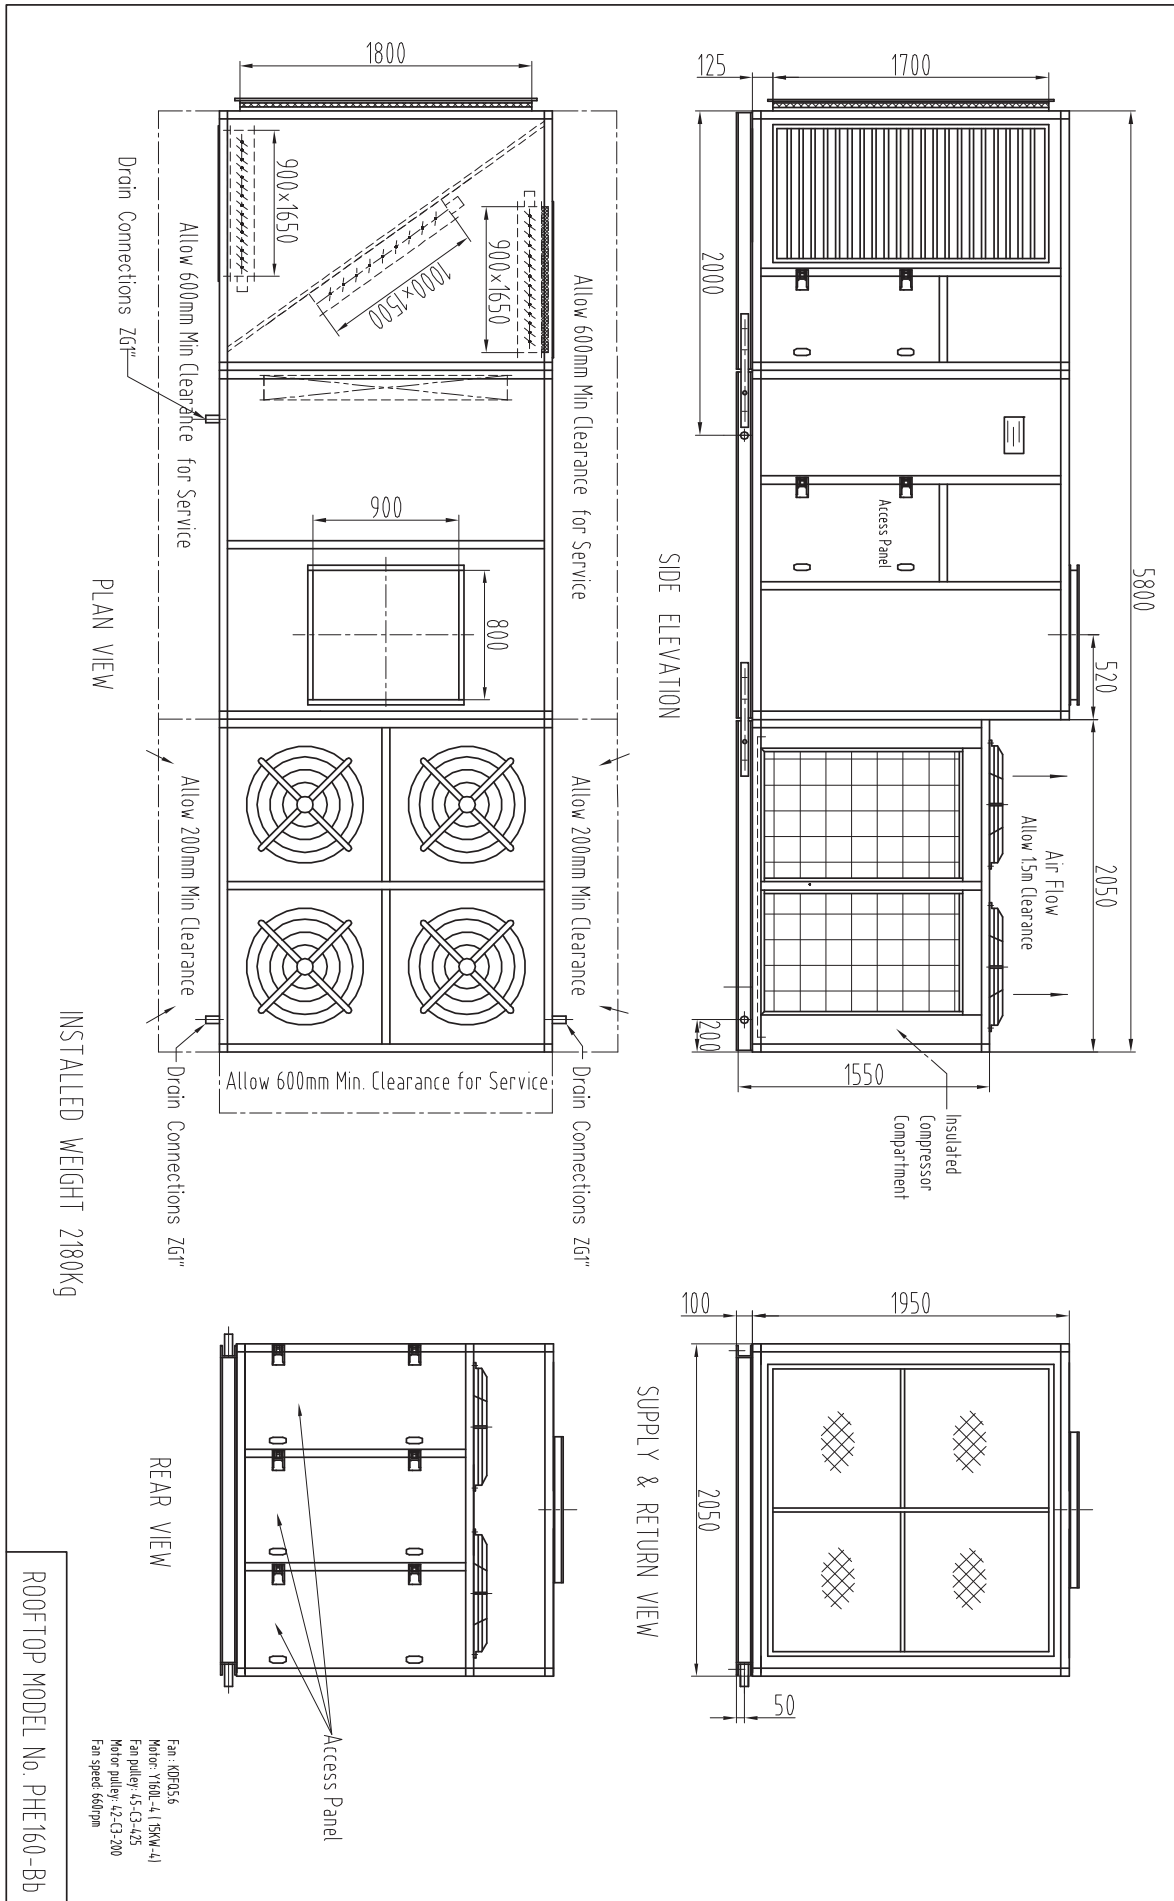

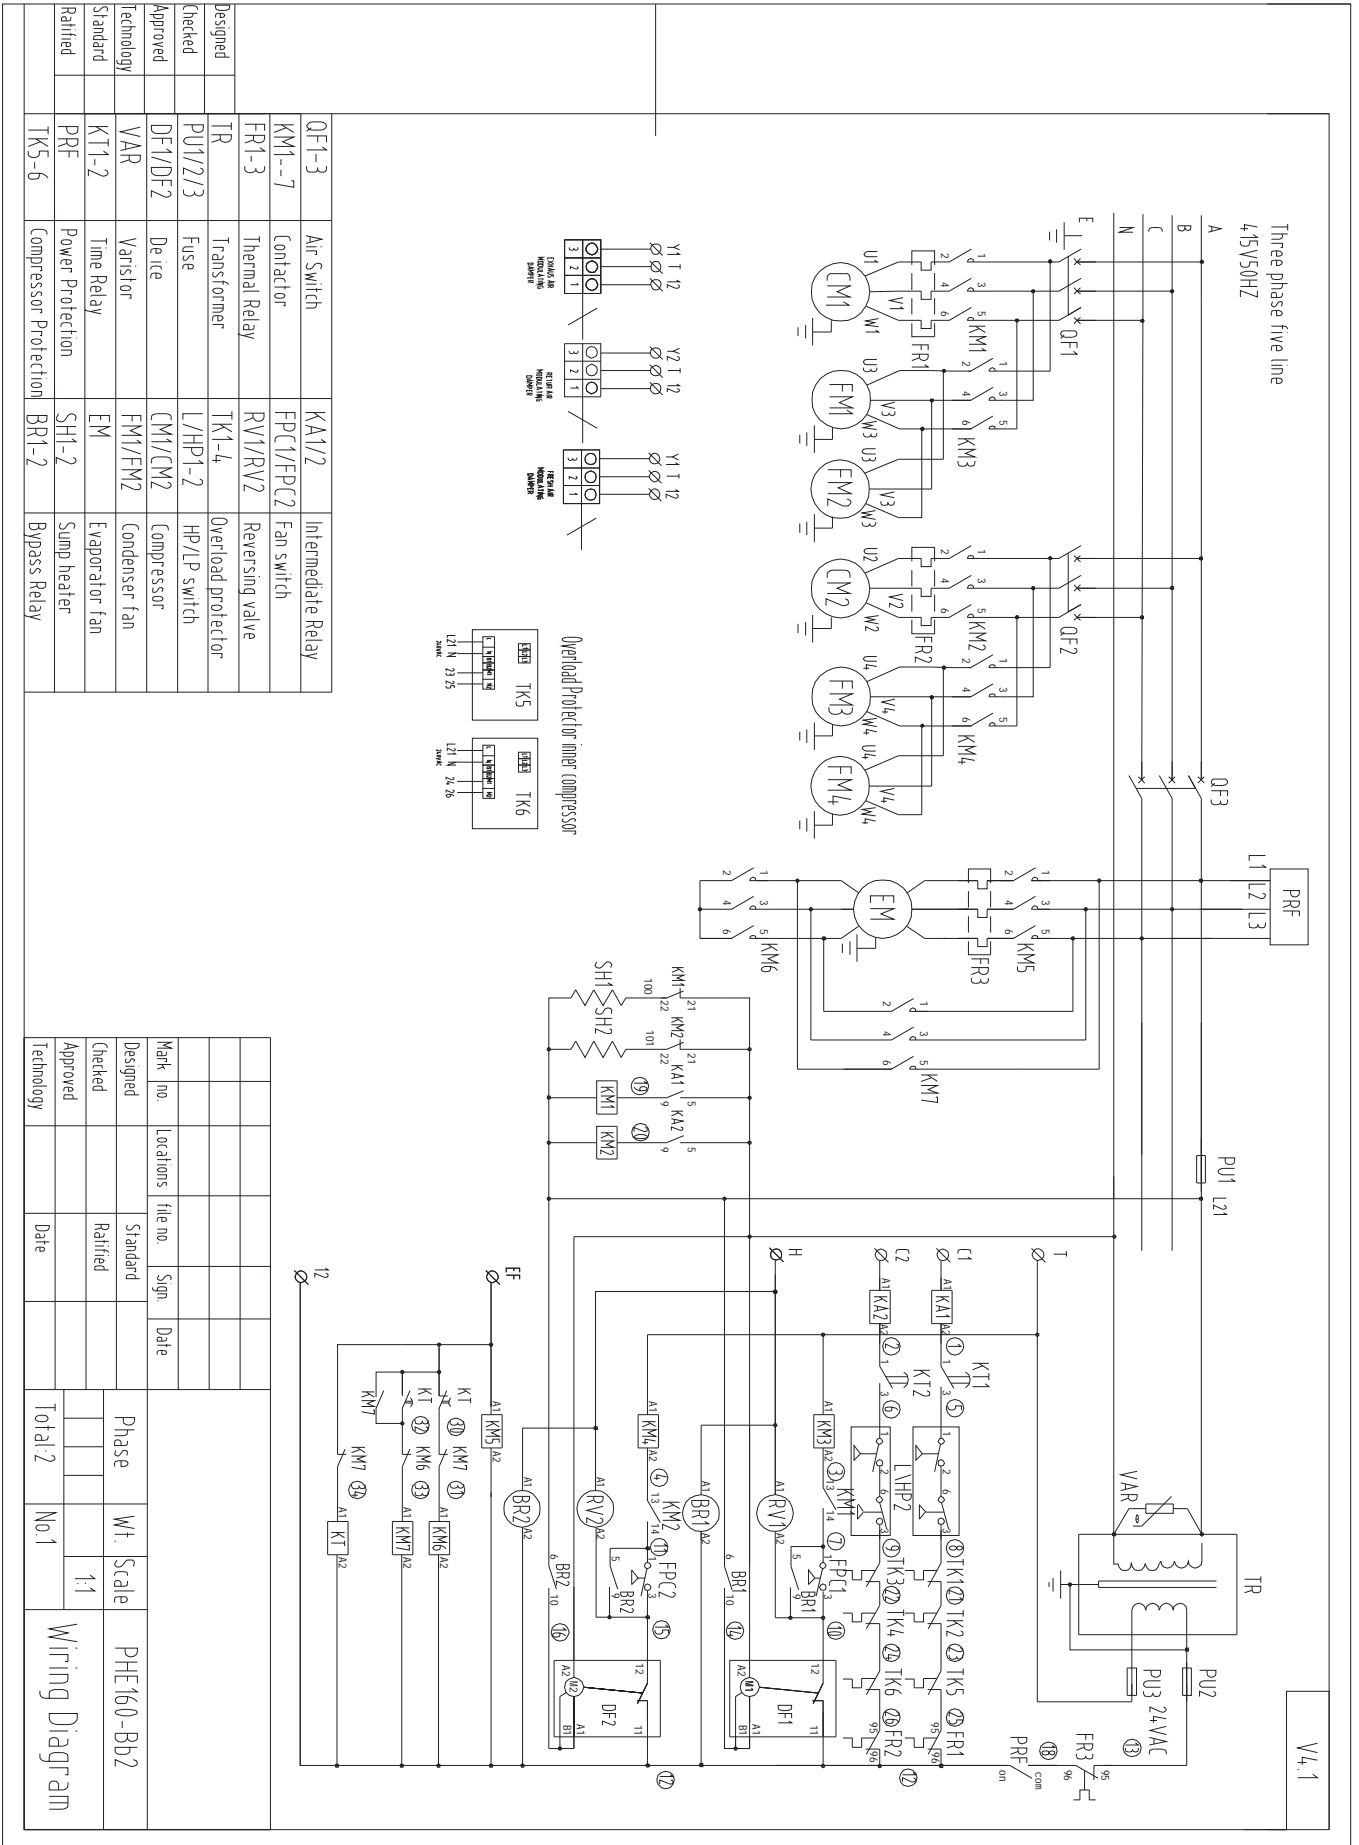

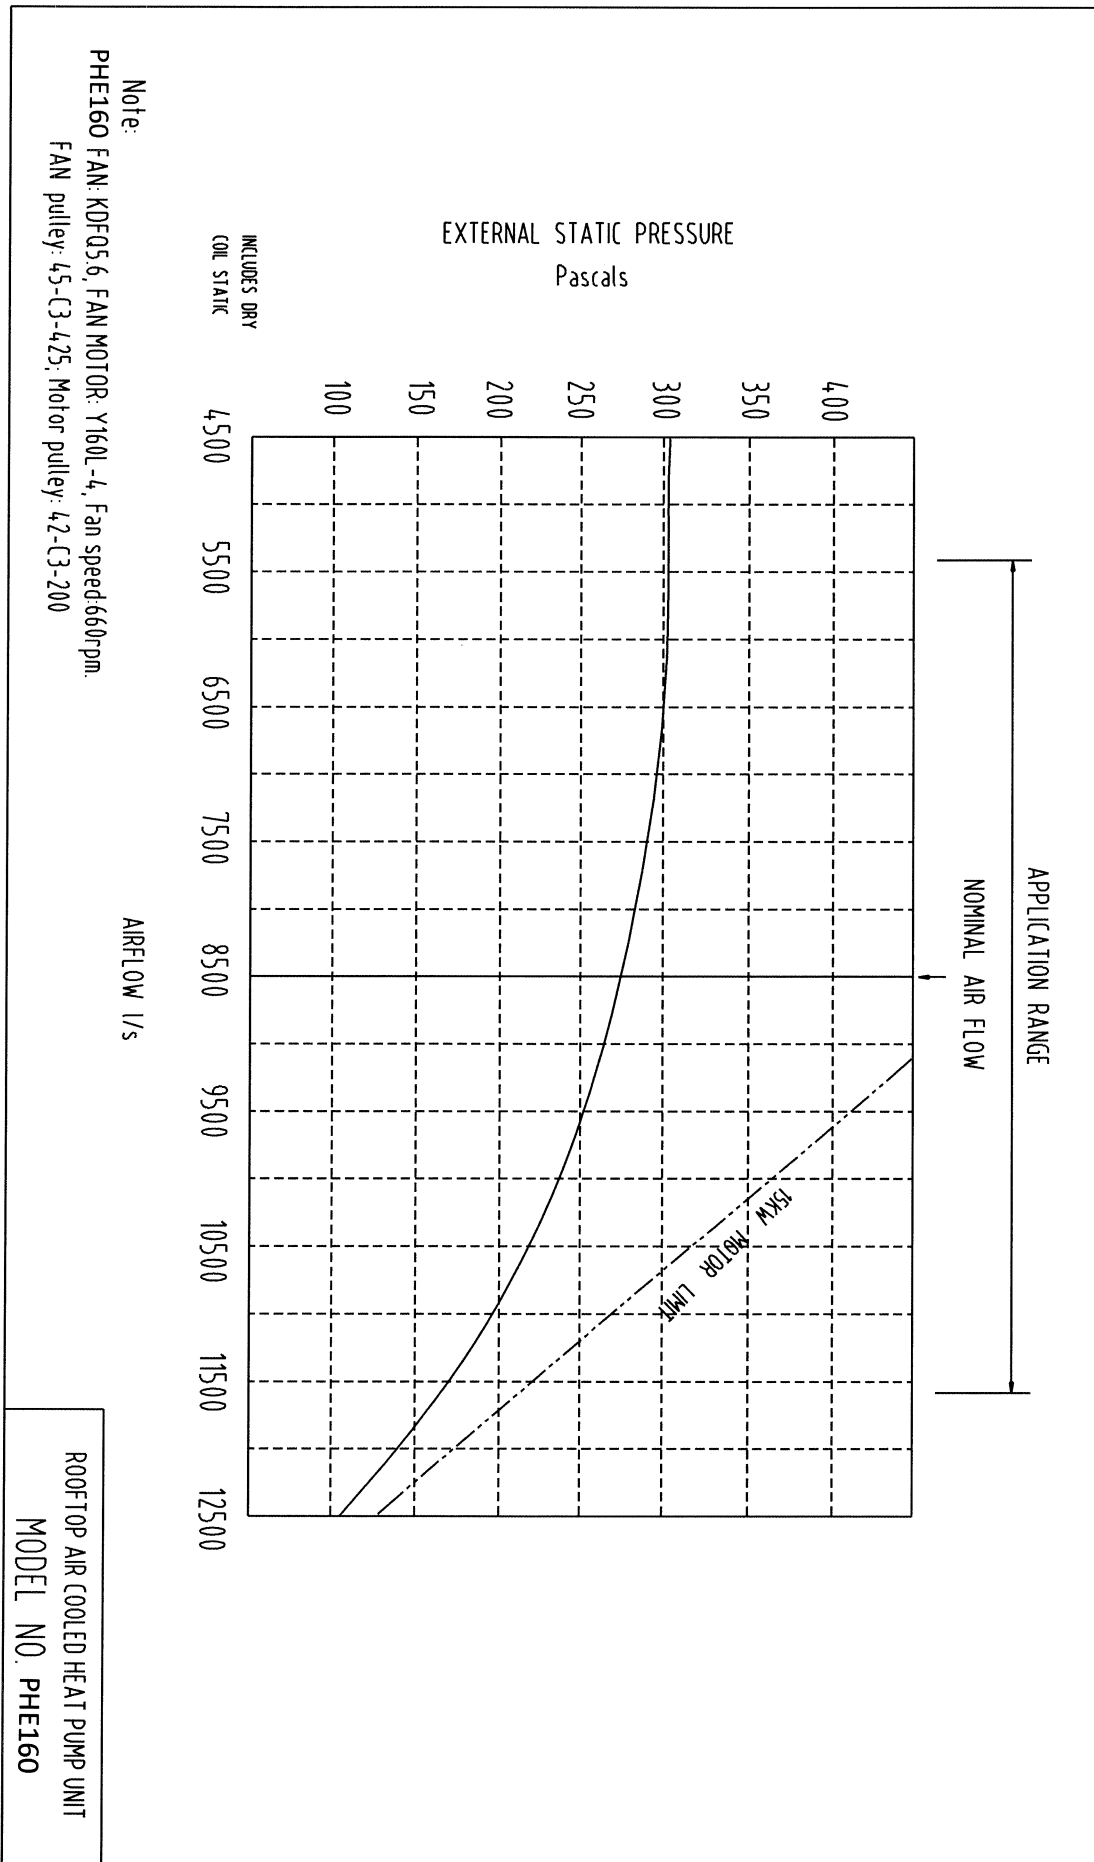

ROOFTOP AIR COOLED HEAT PUMP UNIT  
 MODEL NO. PHE160

PHE160 Noise rate analysing chart

A Class: 86.0dB

Hz	dB
64Hz	90.1
125Hz	88.5
250Hz	85.2
500Hz	79.6
1000Hz	81.2
2000Hz	79.4
4000Hz	73.8
8000Hz	69.3

Noise rate analysing chart ( A Class: 86.0dB) dB

