

Fan Coil Unit

Luxurious Cassettes

FCU40

Model Number Configuration

FCU40-XD-A : Luxurious Cassette

PERFORMANCE DATA

RETURN AIR

Model	Row	Air Flow			Rated Cooling Capacity	Rated heating Capacity	Water Flow	Water Resistance	Noise	Input Power	Weight
		L/S									
		H	M	L	kW	kW	L/S	kPa	dB (A)	W	kg
FCU40	2	189	144	109	3.6	5.4	0.17	22.4	41	62	20

Notes for Return Air:



1. Cooling: Air on temp. DB/WB 27°C/19.5°C, Water in/out temp.7°C/12°C.
2. Heating: Air on temp. 21°C DB . Water in temp. 60°C.

SPECIFICATION


- **Forward curved centrifugal fan**
- **Single phase motor & direct drive**
- **Coils: Copper tube & Aluminum fins**
- **Galvanised sheet casing**
- **A3 steel sheet painting drip-tray**
- **Capacitance type motor**

Luxurious Cassettes

FCU40

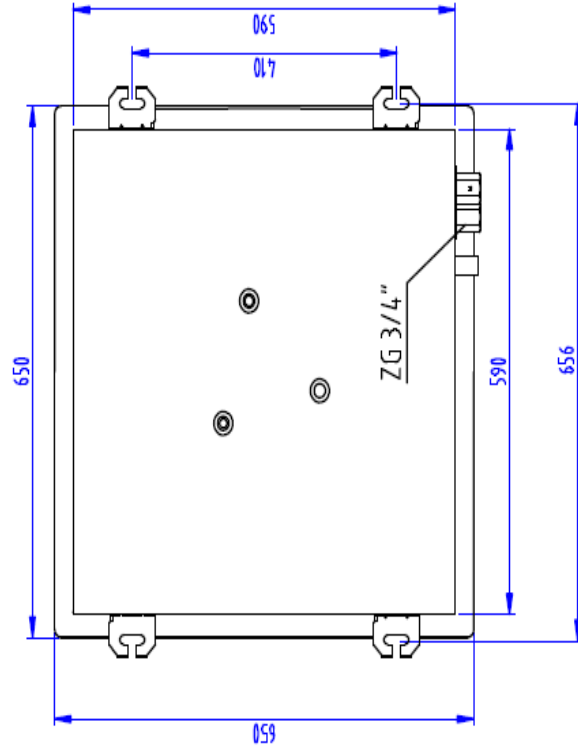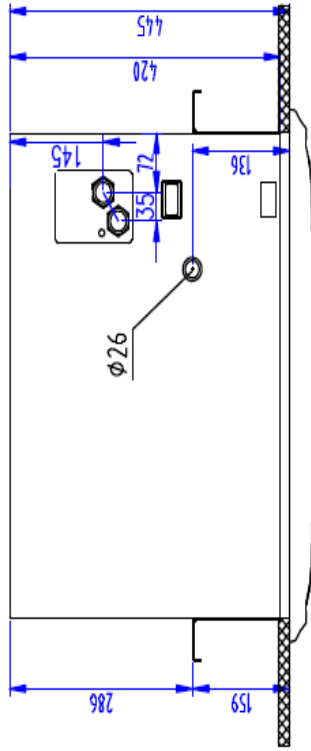


Ceiling Open Size: 610-630mm

DRAWN BY:	DATE: 2009/10/12		
APPROVED D.A.:	APPROVED ENG.:	TITLE: Water Cooled Fan Coil Unit FCU TYPE	
MODEL: FCU40XD-A	DRAWING NO.:	ISSUE:	SHEET SIZE: A4
	SCALE:	SHEET 1 OF 1	

FAN COIL UNIT


Luxurious Cassettes *FCU40*

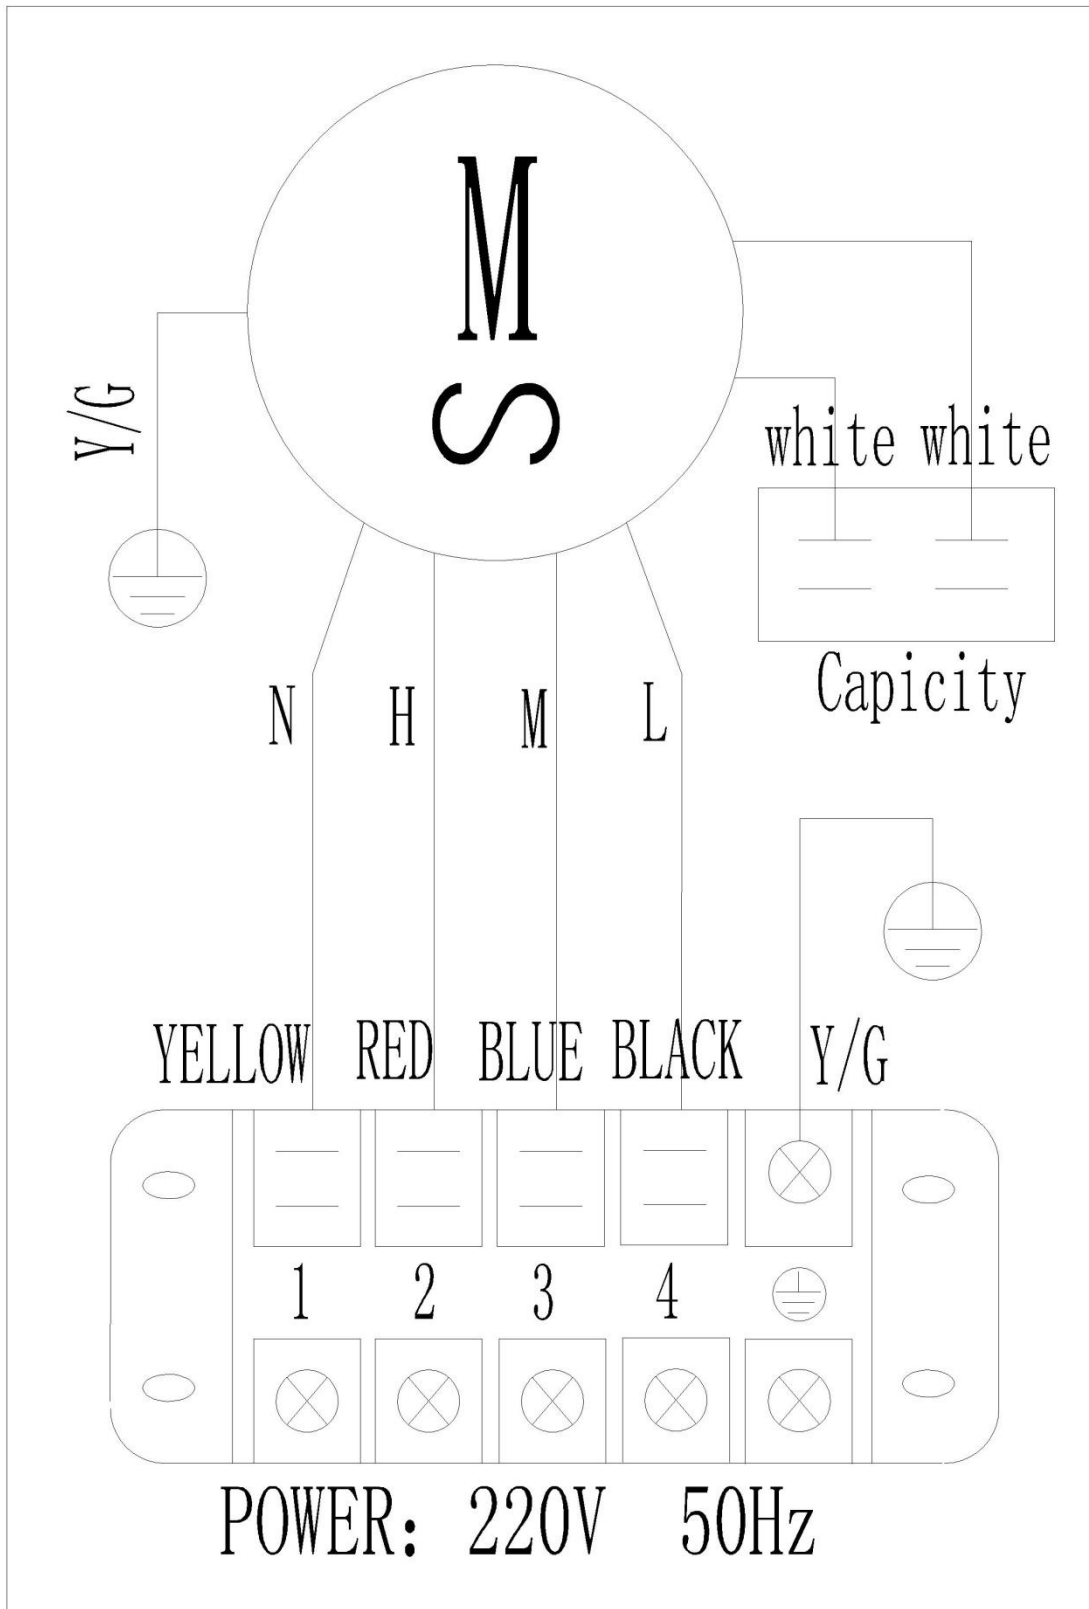

FAN COIL UNIT

Luxurious Cassettes *FCU40*

FAN CURVE

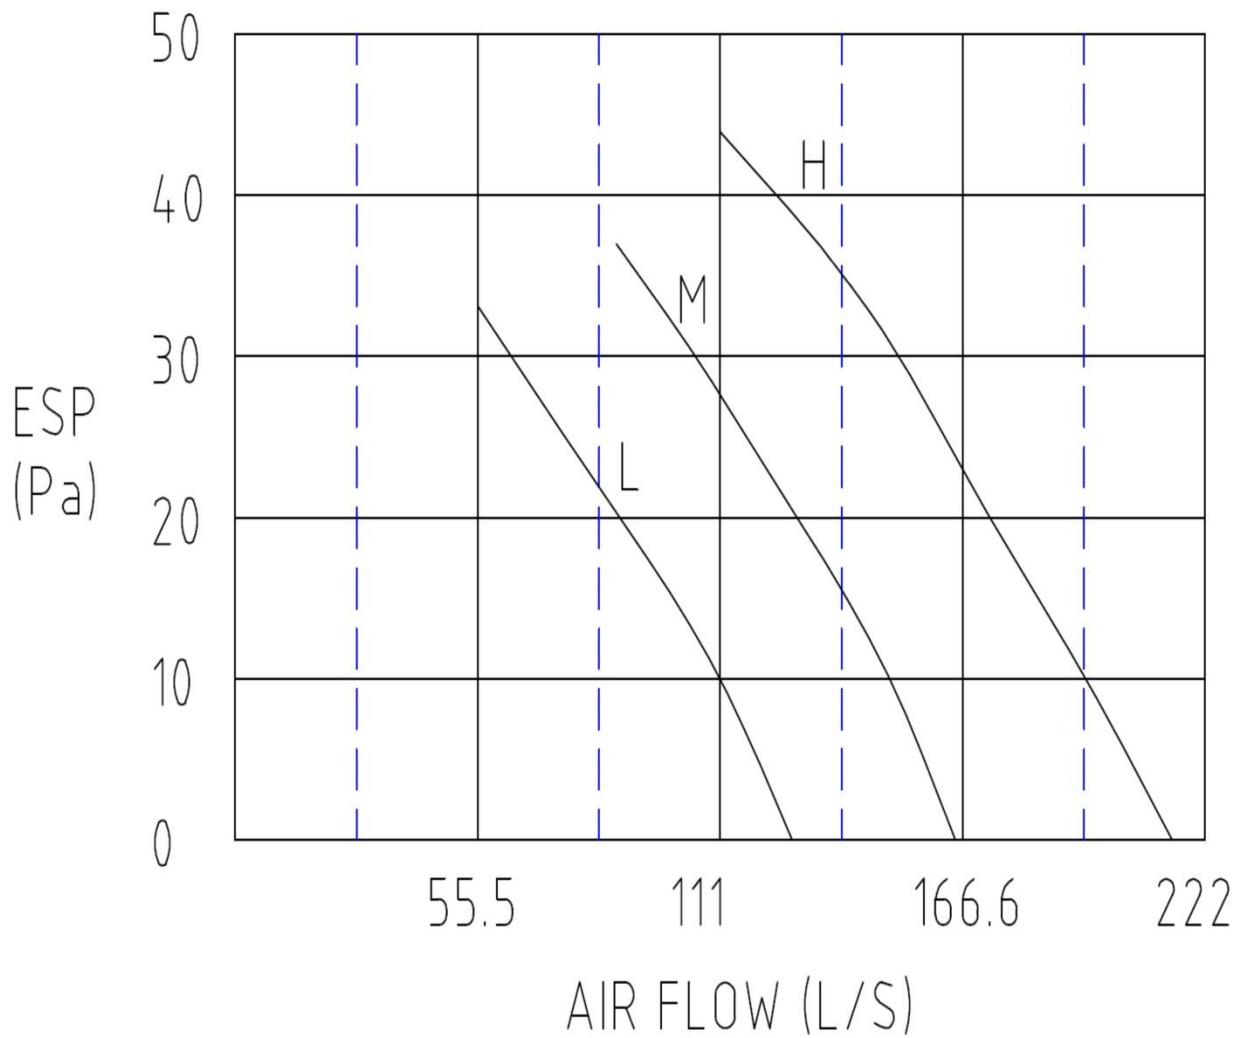

FAN COIL UNIT

Luxurious Cassettes *FCU40*

NOISE CURVE

